


NOMA[®]_{MD}

LED FLUSH MOUNT

model no. 052-2674-0

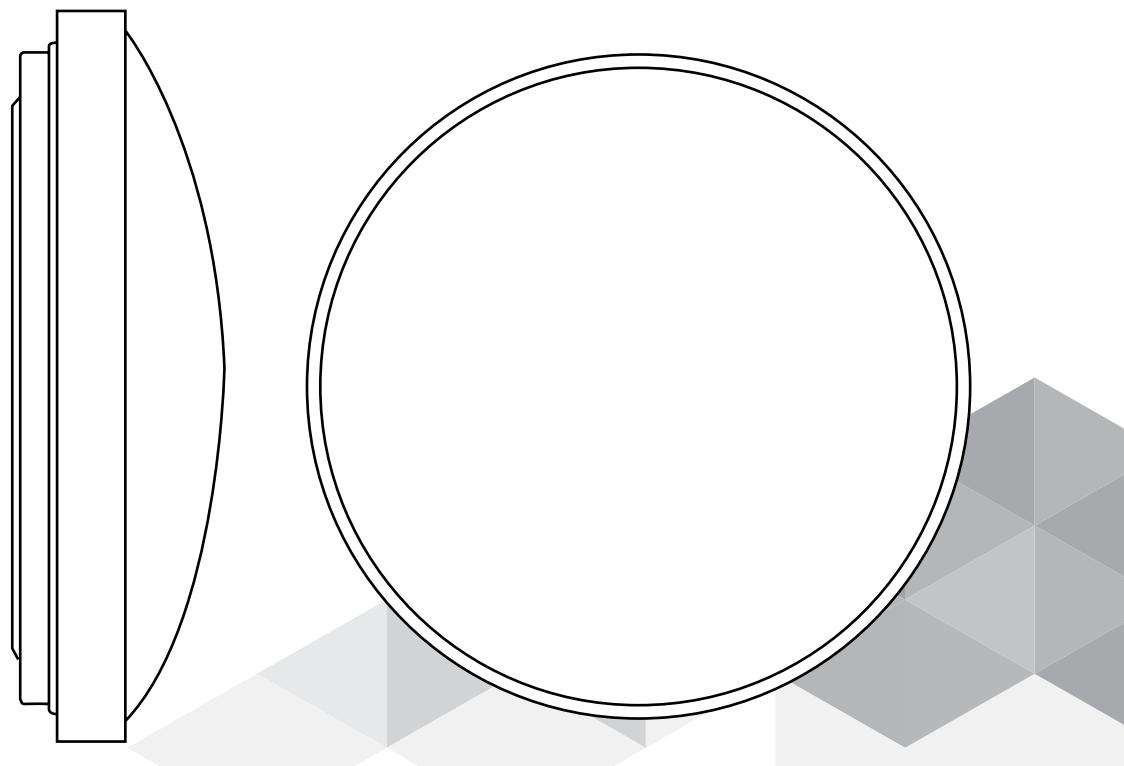

Toll-free: 1-866-827-4985

IMPORTANT: Please read this manual carefully and save it for reference.

Instruction Manual

Preparation	2
Know Your LED Flush Mount	3
Parts List	3
Assembly	4
Safety	5
Troubleshooting	6
Care and Maintenance	7
Warranty	7

Please read and understand this entire manual before attempting to assemble, operate or install the product. Save these instructions so you can refer to them at a later time.

Before beginning assembly and installation of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble, install, or operate the product. Contact customer service for replacement parts.

NOTE

Keep your receipt and these instructions for proof of purchase. Tools Required for Assembly (not included): wire strippers, safety goggles, ladder, gloves, flathead screwdriver, cross-head screwdriver, electrical tape and wire cutters.

This LED Flush Mount is suitable for use with dimmers, but may not be compatible with all dimmers. Compatible dimmers include:

- Lutron® models SCL-153PR-WH, MACL-153M-WH, MSCL-0P153M-WH, DV-603PG-AL, LG-600H-WH, GL-600H-DK, TG-603PGH-WH
- Leviton® models 81000-I, IPL06, IPL06-10Z
- Cooper models SCL03P-A-K, DLC03P-LA
- Aspire models 9534DS-K, 9573WS
- Legrand® model ADWR703HW4

Or see CanadianTire.ca for complete list of compatible dimmers.

READ AND SAVE THESE INSTRUCTIONS!




WARNING: RISK OF ELECTRIC SHOCK

Ensure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker before removing the existing light fixture or installing the new one.




1. Housing Plate - A

2. Diffuser - B

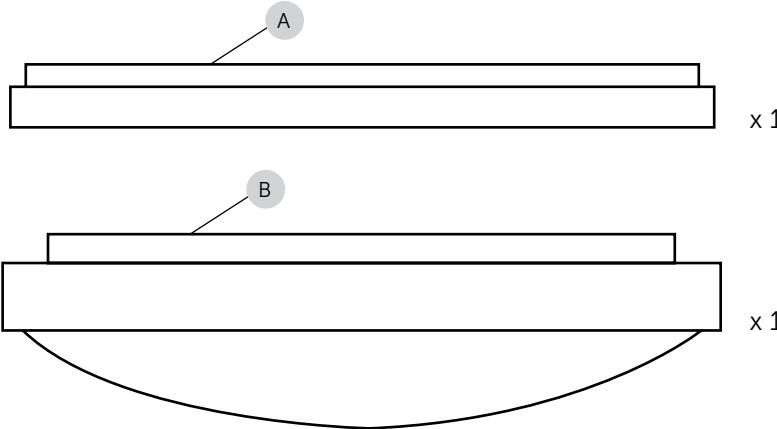

1. Wire Connector - AA

2. Mounting Screw 1 1/2" (3.8 cm) - BB




This fixture does not use a mounting bracket to secure it to the electrical box. Instead, it is secured to the junction box by the included screws specifically designed to ground the housing plate to a metal electrical box. For safe operation, use only the 1 1/2" (3.8 cm) mounting screws included.



NOTE

Hardware not shown actual size.

- With power disconnected to your electrical box, remove the existing fixture. Make a sketch of how the current fixture is wired (by wire color) or mark the wires with masking tape and a pencil so you will know how to properly reconnect the wires to the new LED light fixture.

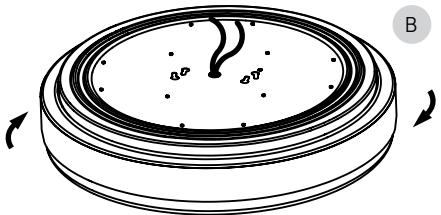


1. Turn the diffuser (B) counter-clockwise to remove it from the housing plate (A).

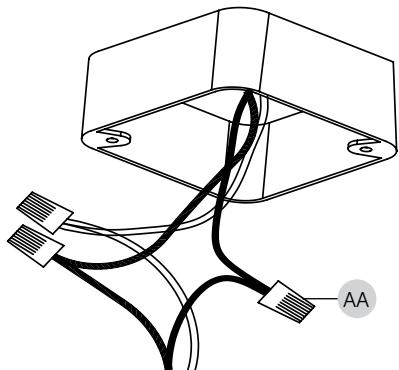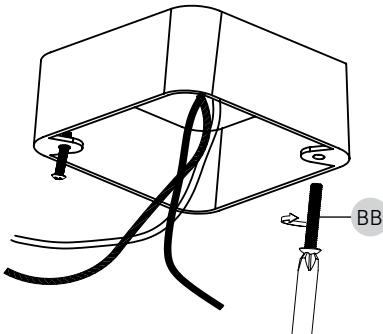


3. Connect the black and white wires of the housing plate (A) with the two wires of the same color from the junction box. Secure together using wire connectors (AA).

Connect the grounding wire of the housing plate (A) with the one from the junction box. Secure together using a wire connector (AA).

2. Screw the mounting screws (BB) into the electrical junction box until there is about $3/8"$ (10 mm) between the ceiling and the underside of the screw head.

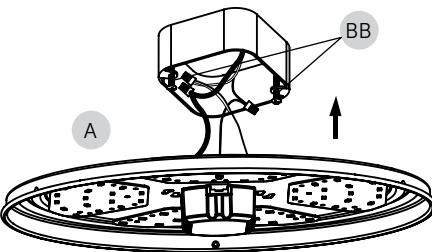

4. Align the keyholes in the housing plate (A) with the mounting screws (BB). Then rotate housing plate (A) to fit to junction box and tighten screws to secure.

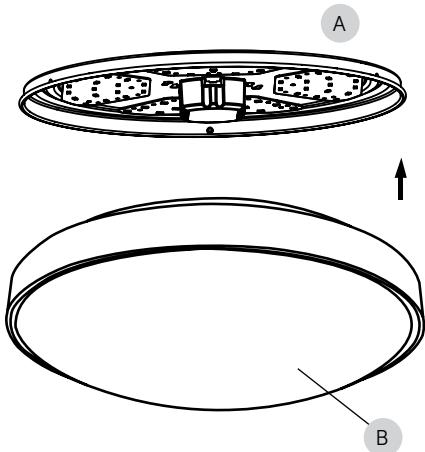

5. Position the diffuser (B) so that it becomes seated in the housing plate (A). Turn the diffuser (B) clockwise to secure it.

6. Turn on the power at the electrical panel. Turn on the light switch to activate the fixture.

NOTICE:

If you are unfamiliar with electrical installations, it is recommended you contact a qualified electrician to do the installation.

NOTICE:

Suitable for damp locations.

**WARNING:**

Carefully read and understand the information given in this manual before beginning the assembly and installation. Failure to do so could lead to electric shock, fire, or other injuries which could be hazardous or even fatal.

**WARNING:**

Ensure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker.

**WARNING:**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**WARNING:**

Before doing any work on the fixture, shut off power supply at the circuit panel to avoid electric shock.

Minor problems often can be fixed without the help of an electrician.

Problem	Reason	Solution
The fixture will not light.	The power is off.	Check to ensure the power supply is on.
	The circuit breaker is off.	Check to ensure the circuit breaker is in the on position.
	There is a bad connection.	Check to ensure proper wire connections are made. Contact a qualified electrician.
	There is a defective switch.	Contact a qualified electrician.
The fuse blows or circuit breaker trips when the light is turned on.	The wires are crossed or the power wire is grounding out.	Check to ensure proper wire connections are made. Contact a qualified electrician.

NOTICE:

This device complies with Industry Canada's license-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

**CAUTION:**

Before attempting to clean the fixture, disconnect the power to the fixture by turning the breaker off or removing the fuse from the fuse box.

This LED light fixture is made from quality materials that will last many years with minimum care. You may want to periodically clean the fixture with a soft cloth. To maintain the best appearance of the fixture, do not use cleaners with chemicals, solvents, or harsh abrasives. Do not use liquid cleaner on the LEDs, LED driver, or wiring inside the light fixture.

This product carries a five (5) year warranty against defects in workmanship and materials. Noma Canada agrees to replace a defective product, within the stated warranty period, when returned to the place of purchase with proof of purchase. This product is not guaranteed against wear or breakage due to misuse and/or abuse.

Made in China

Imported by
Noma Canada, Toronto, Canada M4S 2B8