

CAUTION: If your stereo does not have RCA outputs or does not have enough RCA outputs, do not cut off the RCA barrels and attempt to connect them to speaker wires! We recommend purchasing a Scosche line-out converter which will allow you to convert regular speaker wire into RCA outputs. e2 Part numbers): ELOC, contact the e2 sales team for further information. 1-800-621-3695 Ex.1.

Your installation of this dual amplifier expansion kit is now complete. Reconnect your negative battery wire and put the main fuse into the fuse holder from the single amp kit. For any questions feel free to contact the Tech Support team at: 1-800-621-3695 Ext.3.

RCA CONNECTIONS:

Route the RCA cables from the EAUKF and your single amp kit from the radio location to your amplifiers. Connect cables to the radio and amplifiers making sure to use the same color RCA ends for left and right channels.

GENERAL WIRING TIPS

1. To help prevent electrical noise from entering your audio system RCA audio cables and 12v power cables should not be routed together. Ideally they should be routed on opposite sides of the vehicle. However, if that is not possible, keeping them at least 1 foot apart will usually give good results. 2. Make sure that your wiring is never routed through openings which have rough metal edges. Use grommets whenever necessary. Also be aware that wiring may get pinched beneath seat tracks, clutch and brake pedals. 3. When making any wiring connection, we recommend using crimp connectors or soldering all connections and properly covering with heat shrink or electrical tape.

TOOLS

The following is a list of common tools and supplies required when doing car audio installations:

- wire stripper
- crimp connectors
- crimpers
- test light or multimeter
- solder
- Phillips screwdriver
- drill and drill bits
- tape and wire ties
- soldering iron/gun

USING THE EXPANSION KIT (cont'd)

LIMITED WARRANTY INFORMATION

Scosche Industries Inc. warrants this product to be free from defects in material and workmanship for a period of 1 year from date of purchase. DOA units can be returned to the selling retailer for exchange. Units that have been installed for more then 30 days must be sent back to Scosche for repair. Consumers must call the Scosche 800 number for an RA number and pay to ship the unit back to Scosche. Scosche will then repair or replace the unit at our discretion and pay shipping cost to return unit back to customer. This warranty does not cover any expenses incurred in removal and reinstallation of the product in the vehicle. This warranty is offered to the original purchaser of the product only. This warranty does not apply to product which has been water or physically damaged, damaged by accident or which has been misused, disassembled or altered, or installed improperly. If the product should prove defective within the warranty period, return the product with a copy of the sales slip, postage prepaid to: Scosche Industries Inc., 1550 Pacific Ave., Oxnard CA 93033, Attn: Service Dept.

Your dated sales slip will establish your warranty eligibility. Scosche, at our option will repair or replace the product free of charge and will return the product to you postage paid. In no event shall Scosche be responsible for claims beyond the replacement value of the defective product or in any way be held liable or responsible for consequential or incidental damages. No expressed warranties and no implied warranties, whether for fitness or any particular use, or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Scosche. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by an executive officer of Scosche Industries Inc. No salesperson, representative, or agent of Scosche is authorized to give any guarantee, warranty, or make any representation contrary to the above.

GARANTÍA LIMITADA

Scosche Industries, Inc. garantiza durante un período de 90 días a partir de la fecha de su compra, que este producto se encuentra libre de defectos en sus materiales y mano de obra. Todos los productos Scosche se venden sobreentendiendo que su comprador ha determinado independientemente la aptitud de tales productos. Esta garantía no cubre ningún gasto incurrido para la extracción y reinstalación del producto. Esta garantía se ofrece únicamente al comprador original del mismo.

Esta garantía no será aplicable al producto que hubiese sido dañado accidentalmente, o que haya sido usado incorrectamente, modificado ni instalado inadecuadamente. Si se demostrase que el producto se encuentra defectuoso dentro del plazo cubierto por la garantía, devuélvalo a Scosche Industries, Inc. junto a su comprobante de compra, con sus gastos de franqueo prepago. Sus comprobantes de venta establecerán la elegibilidad de su garantía. A opción de Scosche, reemplazará o reparará el producto libre de cargo y se lo devolverá con franqueo pagado.

En ninguna circunstancia Scosche será responsable por reclamos que excedan el valor de reemplazo del producto defectuoso ni, en manera alguna, susceptible ni responsable por daños resultantes ni accidentales. Tampoco serán de aplicación garantías expresas ni implícitas, ya sea por aptitud u otra utilización en particular ni de otra manera, excepto por aquello específicamente indicado anteriormente (lo que se especifica expresamente en lugar de cualquier otra garantía) que aplicará a los productos vendidos por Scosche. No serán válidos el renunciamiento, la alteración, la adición ni la modificación de las condiciones precedentes, a menos que se encuentren escritas y firmadas por un miembro ejecutivo de Scosche Industries, Inc. Ninguna persona de ventas, representante ni agente de Scosche está autorizada para avalar ni para otorgar garantía ni representar en forma contraria a lo arriba expresado.

INFORMATION DE GARANTIE

Scosche Industries, Inc. garantit ce produit d'être libre de tout défaut de matériaux et de fabrication pour une période de 90 jours à partir de la date de l'achat. Les unités défectueuses à l'achat peuvent être retournées au détaillant pour échange. Les unités qui ont été installées pour plus de 30 jours doivent être retournées chez Scosche pour la réparation. Les consommateurs doivent appeler le numéro 800 de Scosche pour obtenir un numéro d'autorisation de retour (RA) et ils sont responsables des frais de transport de l'unité retournée chez Scosche. Scosche, à sa discrétion, réparera ou remplacera l'unité sans frais et paiera les frais d'expédition du retour au client. Cette garantie ne couvre pas les frais encourus pour l'installation, le retrait ou la réinstallation de ce produit dans le véhicule. Cette garantie est offerte à l'acheteur original seulement. Cette garantie ne couvre pas le produit s'il est physiquement endommagé, endommagé par l'eau ou par accident, ou soumis à l'abus, désassemblé ou modifié ou installé incorrectement. Si le produit est trouvé défectueux durant la période de la garantie, renvoyez-le avec frais de port payés accompagné du reçu de caisse à : **Scosche Industries Inc., 1550 Pacific Avenue, Oxnard CA 93033, Attn : Département de service**

Votre reçu de caisse original indiquant la date de l'achat établira l'admissibilité à la garantie. Scosche, à sa discrétion, réparera ou remplacera l'unité sans frais et paiera les frais d'expédition du retour au client. Scosche, en aucune circonstance ne sera responsable pour les réclamations au-delà de la valeur de remplacement du produit défectueux et refuse toute responsabilité envers les dommages incidents ou accessoires. Aucune garantie explicite ou implicite, soit d'adaptabilité pour un usage particulier ou autre, sauf celle qui précède (laquelle est expressément présentée au lieu de toutes autres garanties), ne sera applicable aux produits vendus par Scosche. Aucun abandon, altération, ajout ou modification de ce qui précède ne sera valide sauf si présentés en écrit et signés par un officier de l'exécutif de Scosche Industries Inc. Aucun représentant des ventes ou autre, ou agent de Scosche est autorisé à fournir toute garantie ou à faire toutes représentations contraires à ce qui précède.

2

1. If you do not have a previously installed amplifier kit, this dual amp expansion kit will not provide you with all the required equipment. This kit is designed to be used with a separate standard amplifier kit.

2. Carefully loosen the set screws on the EAUKF distribution block. Remove and discard the small clear plastic tubes inside the block that help to retain the screws during shipping. Strip ½" of the insulation from the end of your previously installed standard wiring kit. Insert the stripped end into the input side of the distribution block that has only 1 hole and secure with the set screw.

NOTE: You may need to remove the wire gauge adapter ring from inside the distribution block if your main power cable is larger than 8 gauge.

3. Using the 6 ft. of 8 gauge power cable included in the package, strip back ½" of the insulation and insert the cable into one of the two output holes in the distribution block and secure with the set screw. Route the cable to the amplifier.

Hint: This cable will be cut so it can be used to supply power to both amps. Plan your installation carefully to ensure that you have enough wire to reach from the block to both amplifiers.

4. Cut the cable at the amplifier. Strip back the insulation and crimp one of the supplied 8 gauge spade terminals to the stripped end. Connect the cable to the 12V POWER input on your amplifier.

5. Use the remaining 8 gauge power cable from the EAUKF and repeat steps 3 and 4 to connect power to your second amplifier.

6. Crimp a supplied ring terminal to one end of the 2.5 ft. 8 gauge ground wire included in the package. Use a self tapping screw to tightly secure the ring terminal to a clean, non-painted metal part of the vehicles chassis near the amplifier. If necessary use sandpaper to remove the paint until a bright metal surface is showing.

POWER CONNECTIONS:

CAUTION: DISCONNECT YOUR NEGATIVE BATTERY TERMINAL BEFORE BEGINNING ANY ELECTRICAL WORK.

USING THE EXPANSION KIT

PLEASE READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING ANY PARTS OF THIS DUAL AMP EXPANSION KIT


CAUTION:

1. Read all manufacturer warnings regarding vehicle's electrical service, air bags, ABS brakes, engine & body computers.
2. Disconnect Negative (-) battery terminal before beginning your installation.
3. Wear eye and skin protection.
4. Keep sparks, flames and lit cigarettes away from the car battery.
5. Keep all parts of this kit out of reach of children.

EAUKF

DUAL AMPLIFIER EXPANSION KIT

The e2 EAUKF dual amplifier expansion kit is not designed to be used as a stand alone wiring kit. Installation of this expansion kit must be done after a standard single amp wiring kit has been installed. For best results we recommend using the EAUKF with e2 E400F or E1000f single amp kits. For questions regarding proper installation of this product please feel free to contact: **Tech Support at: 1-800-621-3695 Ext.3**

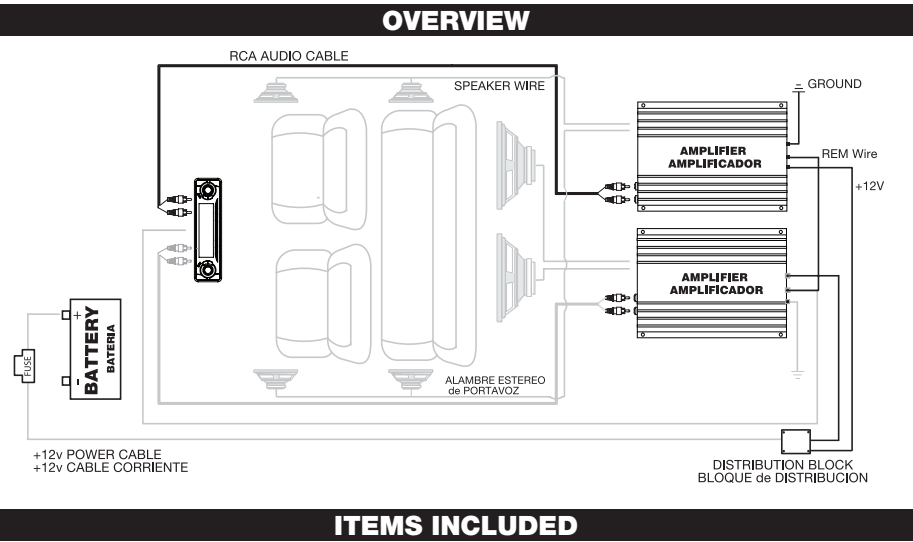

- ITEMS INCLUDED**
- | | | |
|------------------------------------|---|------------------------------|
| (1) 16 ft. RCA cable | (1) 1 input to 2 output distribution block (with 4 mounting screws) | (2) 8 ga. ring terminals |
| (1) 6 ft. 8 ga. power wire | (2) 18-22 ga. spade terminals | (1) 12-14 ga. butt connector |
| (1) 2.5 ft. of 8 ga. ground wire | (2) 8 ga. spade terminals | (2) self tapping screws |
| (1) 6 ft. blue remote turn on wire | | |

IMPORTANT!

Do Not Return Product to the Retailer!

IF YOU NEED ASSISTANCE OR REPLACMENT PARTS

Call us FIRST at . . .

1-800-621-3695 ext 3

Toll Free, No-Charge tech support

FRIENDLY CUSTOMER SERVICE TECHNICIANS
YOU WON'T BE ON HOLD LONGER THAN 5 MINUTES

OUR HOURS ARE:
Monday - Friday 8:00 a.m. to 5:30 p.m. (PST)
Saturday 8:00 a.m. to 2:00 p.m. (PST)