NOMA iQ

SMART WI-FI WATER LEAK SENSOR

046-3370-2

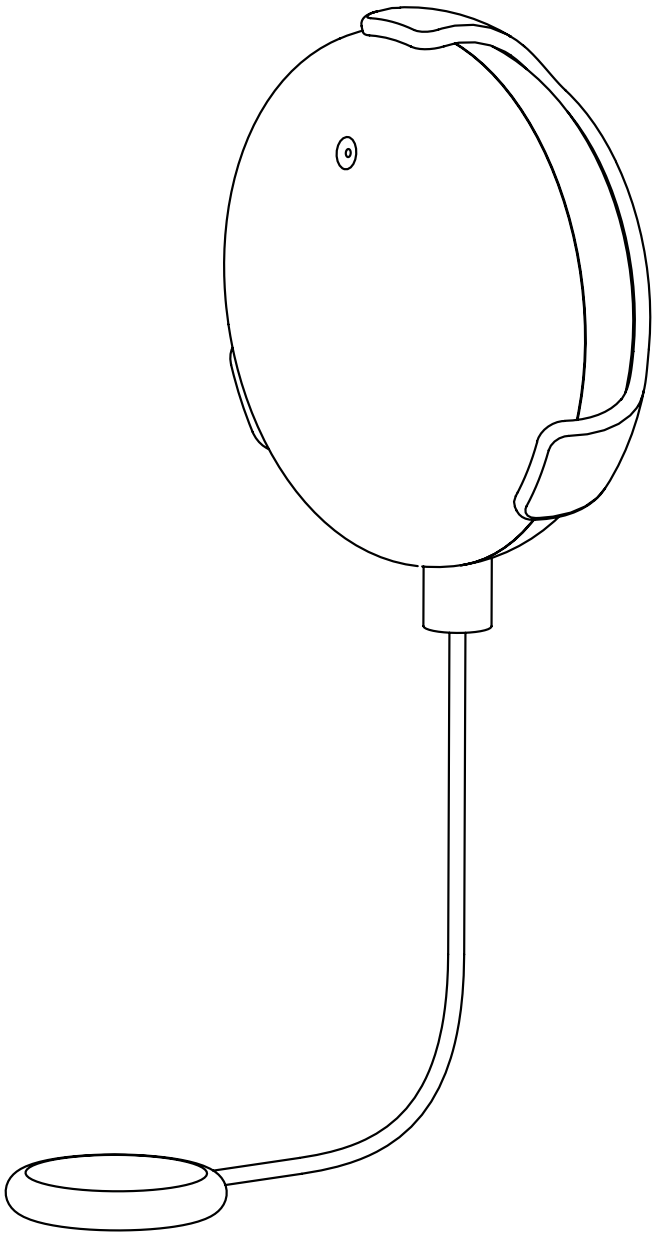

USER MANUAL

READ AND SAVE THESE INSTRUCTIONS

TABLE OF CONTENTS

WHAT'S IN THE BOX 3

INSTALLATION 5

SPECIFICATIONS 6

WARNINGS 7

BATTERY REPLACEMENT 8

WARRANTY 8

WHAT'S IN THE BOX

SMART WATER SENSOR

MOUNTING ACCESSORIES

HOLDER

1 X BATTERY



smart
water sensor



holder



mounting
accessories

1 x battery

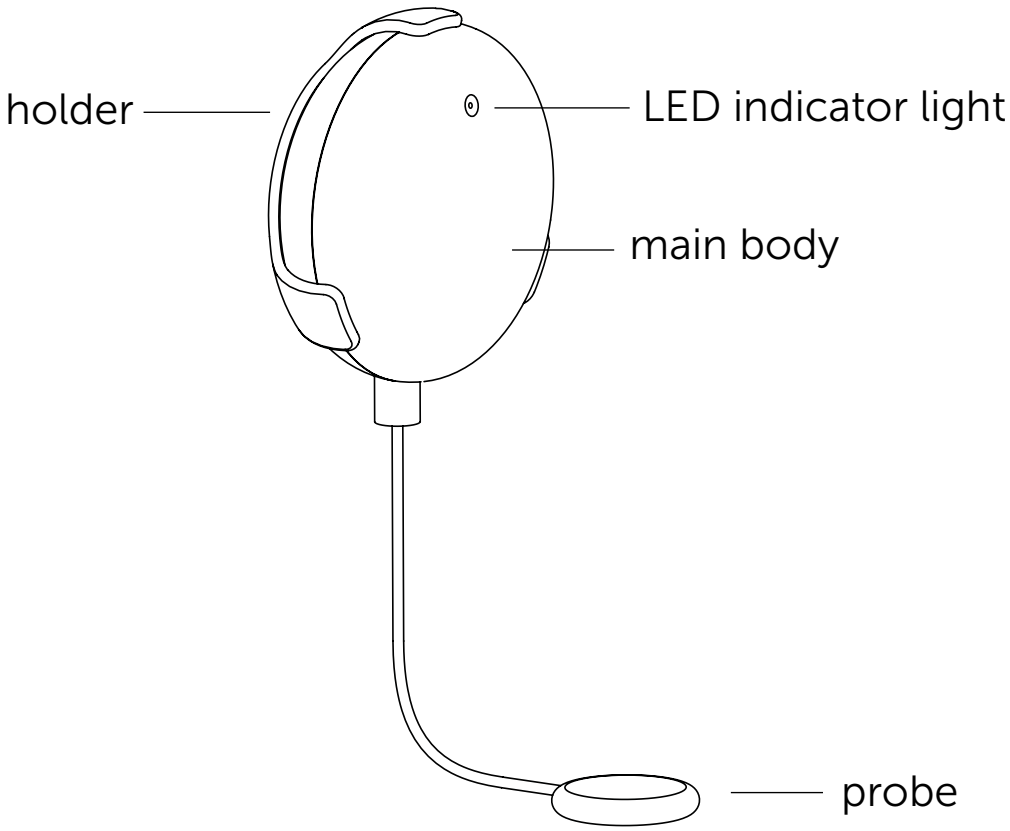

INSTALLATION

- Remove the holder from the main body. Twist the top half of the sensor counter-clockwise. Once the casing is off, remove the small plastic tab on the battery terminal. The battery will be connected and the sensor will automatically be in pairing mode.

- If not in pairing mode, press and hold the power/reset button for 5 seconds until flashing slowly. Then release the button and the sensor will enter pairing mode.



- In order to pair the device, please enable and give permission for Location Services and Bluetooth on your mobile device. In the NOMA iQ app, select the "+" symbol in the top right-hand corner. Select the device and follow the instructions within the app.

MOUNTING INSTRUCTIONS

- When you select your mounting location, make sure the surface area is clean.

- During the mounting process, ensure the metal contacts on the probe are facing downwards.

  Remove the holder from the main body. Select your location and mount the holder using the included screw and wall anchor, or using the adhesive mount. Once installed, insert the main body and plug in the probe.

  Once the main body has been placed in its intended location, place the probe where a potential leak may occur.

  Note: Once your water sensor has been connected to the NOMA iQ app, make sure to check that the sensor is working by placing the probe in water. The sensor should light up and make a sound as it detects water.

SPECIFICATIONS

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. READ ALL INSTRUCTIONS BEFORE USE.

SPECIFICATIONS

- Required battery: 1x CR2-3V
- Standby current: 13 µA
- Working current: 115 mA–120 mA
- Wireless type: 2.4 GHz
- Wireless range: 148" (45 m)
- Wireless Protocol: IEEE 802.11b/g/n

WARNING

• WARNING - To reduce the risk of fire, electric shock, or serious personal injury:

• Do not immerse or expose the main body in/to water or other liquids.
• This product is not intended for use by children and contains small parts that may pose a choking hazard to children under the age of three. Keep the product out of the reach of children and pets.

WARNING:
Keep batteries away from children and pets.
• Follow the battery manufacturer's safety and usage instructions.
• Insert the battery observing the proper polarity (+/-) as indicated inside the battery compartment.

CAUTION:
Failure to properly align the battery polarity can cause personal injury and/or property damage.
• Remove a spent or discharged battery from the product. Remove the battery when not using the product for an extended period.
• Never throw batteries into a fire. Do not expose batteries to fire or other heat sources.

DISPOSAL OF USED BATTERIES:
Battery may contain hazardous substances which could endanger the environment and human health. Used batteries shall not be treated as municipal waste, but left at the appropriate collection point for recycling. For more information about collection and recycling of used batteries, please contact your local municipality or waste disposal service.

• Use type CR2-3V battery.
• Install only new batteries of the same type in your product.
• Failure to insert batteries in the correct polarity, as indicated in the battery compartment, may shorten the life of the batteries or cause batteries to leak.
• Danger of explosion if battery is incorrectly replaced.

BATTERY REPLACEMENT & WARRANTY

BATTERY REPLACEMENT:

1. Remove the holder from the main body.
2. Twist the top half of the sensor in a counter-clockwise rotation.
3. Remove the spent battery and place 1x CR2-3V battery into the battery compartment, correctly observing the polarity indications (+/-).
4. Replace the top half of the sensor by rotating it clockwise.

LIMITED WARRANTY:

This NOMA product carries a one (1) year repair warranty against defects in workmanship and materials. At its discretion, NOMA Canada agrees to have any defective part(s) repaired or replaced free of charge within the stated warranty period, when returned with proof of purchase. This product is not guaranteed against wear or breakage due to misuse and/or abuse.

NOMA iQ

DÉTECTEUR DE FUITE D'EAU INTELLIGENT À CONNEXION WIFI

046-3370-2

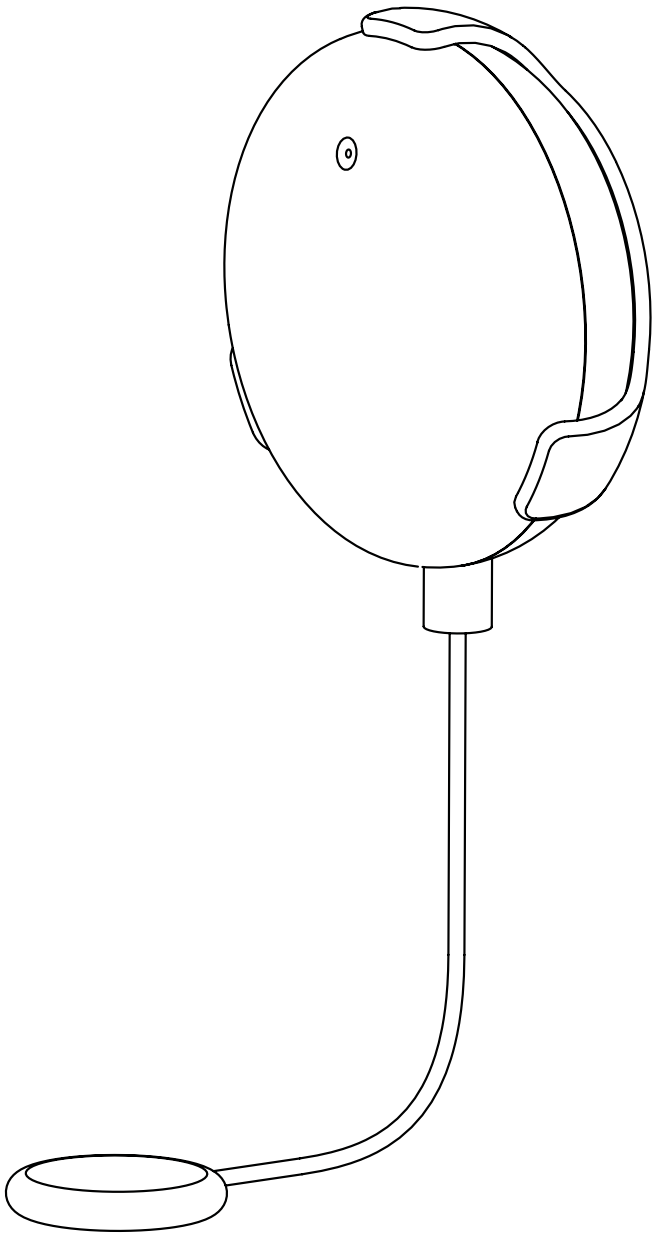

GUIDE D'UTILISATION

LISEZ ET CONSERVEZ CES INSTRUCTIONS

TABLE DES MATIÈRES

CONTENU DE LA BOÎTE 13

INSTALLATION 15

AVERTISSEMENTS 17

REMPLACEMENT DE LA PILE 18

GARANTIE 18

CONTENU DE LA BOÎTE

CAPTEUR D’EAU INTELLIGENT

ACCESSOIRES D’INSTALLATION

SUPPORT

1 X PILE



capteur d’eau intelligent



support



accessoires de montage

1 x pile

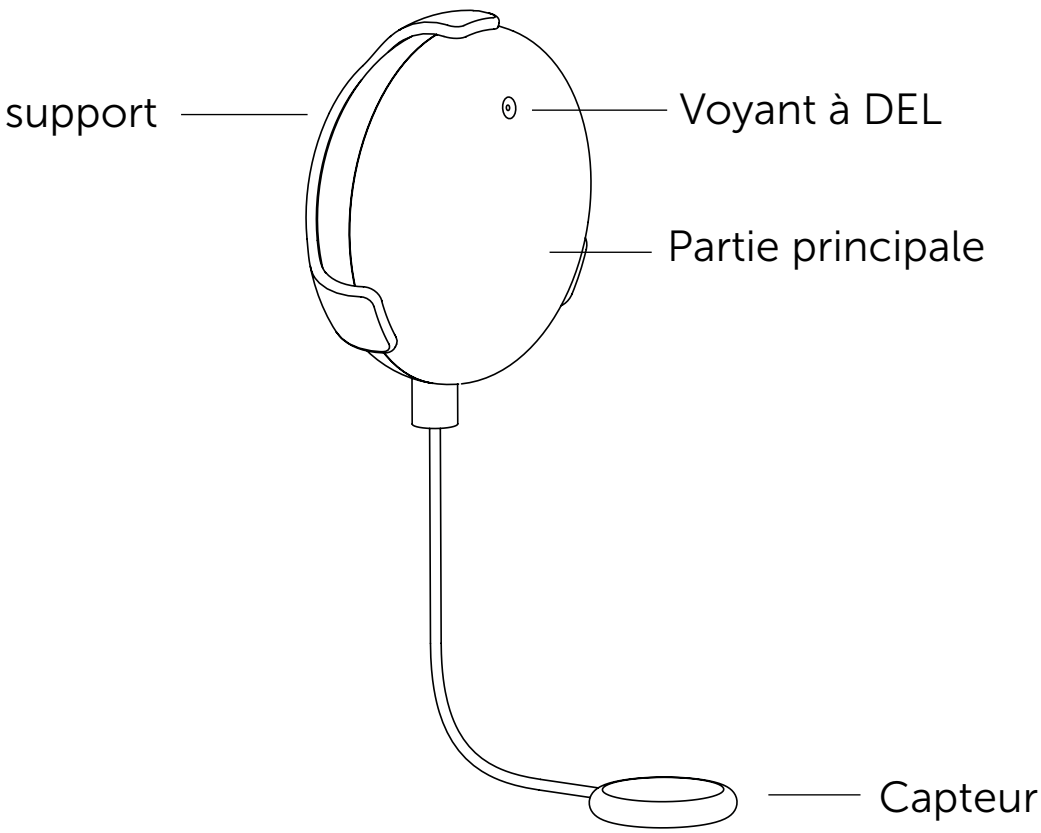

INSTALLATION

INSTRUCTIONS D'INSTALLATION

- Retirez le support de la partie principale. Tournez la partie supérieure du détecteur dans le sens antihoraire. Une fois le détecteur ouvert, retirez la petite languette de plastique de la borne de la pile. La pile alimentera le détecteur, qui passera en mode couplage.
- Si ce n'est pas le cas, maintenez le bouton d'alimentation/de réinitialisation enfoncé pendant 5 secondes, jusqu'à ce qu'il clignote lentement. Relâchez le bouton, et le détecteur se mettra en mode couplage.



- Afin d'appairer l'appareil, veuillez activer et autoriser les services de localisation et Bluetooth sur votre appareil mobile. Dans l'application NOMA iQ, sélectionnez le symbole «+» dans le coin supérieur droit. Sélectionnez l'appareil et suivez les instructions de l'application.
- Assurez-vous que l'endroit choisi est propre.
  Pendant l'installation, orientez les contacts métalliques du capteur vers le bas.
- Retirer le support de la partie principale. Choisissez votre emplacement et montez le support à l'aide de la vis et de l'ancrage mural inclus, ou à l'aide du support adhésif. Insérer la partie principale dans le support et brancher le capteur
- Une fois que le corps principal a été placé à l'endroit prévu, placez la sonde à l'endroit où une fuite potentielle peut se produire.
- Remarque : Une fois que votre capteur d'eau a été connecté à l'application NOMA iQ, assurez-vous de vérifier que le capteur fonctionne en plaçant la sonde dans l'eau. Le capteur doit s'allumer et émettre un son lorsqu'il détecte de l'eau.

CARACTÉRISTIQUES

CONSERVEZ LES INSTRUCTIONS POUR CONSULTATION ULTÉRIEURE. LISEZ TOUTES LES INSTRUCTIONS AVANT L'UTILISATION.

CARACTÉRISTIQUES

- Pile requise : 1 pile CR2 de 3 V
- Courant (en veille) : 13 µA
- Courant (en marche) : 115 à 120 mA
- Type de connexion sans fil : 2,4 GHz
- Portée de la connexion sans fil : 148 pi (45 m)
- Protocole sans fil : IEEE 802.11 b/g/n

AVERTISSEMENT

- AVERTISSEMENT – Pour réduire les risques d'incendie, d'électrocution ou de blessure grave :

• Ne pas immerger la partie principale dans l'eau ou dans d'autres liquides.
• Garder le produit hors de la portée des enfants et des animaux. Il n'est pas conçu pour les enfants; il comporte de petites pièces posant un risque d'étouffement pour les enfants de moins de trois ans.

AVERTISSEMENT
Gardez les piles hors de la portée des enfants et des animaux.
• Suivez les consignes de sécurité et d'utilisation du fabricant des piles.
• Installez la pile en respectant la polarité (+/-), comme indiqué dans le compartiment.

MISE EN GARDE
Le non-respect de la polarité de la pile peut causer des blessures ou des dommages.
• Retirez la pile du produit lorsqu'elle est vide ou lorsque le produit ne sera pas utilisé pour une longue période.
• Ne jetez jamais jeter des piles au feu. Ne les exposez pas au feu ni à d'autres sources de chaleur.

ÉLIMINATION DES PILES USAGÉES :
Les piles peuvent contenir des substances dangereuses pour l'environnement et pour la santé humaine. Elles ne doivent pas être traitées comme des déchets municipaux, mais déposées à un point de collecte pour le recyclage. Pour en savoir plus, communiquez avec votre municipalité ou service d'élimination des déchets.

- Utilisez une pile de type CR2 de 3 V.
- Utilisez seulement de nouvelles piles du même type dans le produit.
- Insérez les piles en respectant la polarité indiquée, sinon elles peuvent se vider plus rapidement ou couler.
- Une pile mal remplacée pose un risque d'explosion.

REMPLACEMENT DE LA PILE ET GARANTIE

REMPLACEMENT DE LA PILE :

1. Retirez le support de la partie principale.
2. Tournez la partie supérieure du détecteur dans le sens antihoraire.
3. Retirez la pile usagée et installer une pile CR2 de 3 V neuve dans le compartiment en respectant la polarité (+/-).
4. Remettez la partie supérieure du détecteur en la tournant dans le sens horaire.

GARANTIE LIMITÉE :

Ce produit NOMA comporte une garantie de réparation d'un (1) an contre les défauts de fabrication et de matériaux. À sa discrétion, NOMA Canada accepte de faire réparer ou remplacer gratuitement toute pièce défectueuse au cours de la période de garantie indiquée, lorsqu'elle est retournée avec une preuve d'achat. Ce produit n'est pas garanti contre l'usure ou le bris dû à une mauvaise utilisation ou à un abus.