




CANVAS^{TM/MC}

JARVIS 2-LIGHT FLUSH MOUNT

PRODUCT NO. 052-6103-6

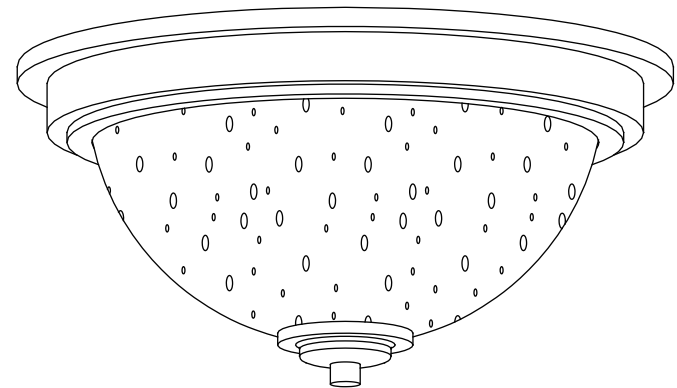

ASSEMBLY INSTRUCTIONS



HAVING TROUBLE?

TOLL-FREE:

1-888-670-6684

IMPORTANT: Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

CANVAS™

INSPIRED BY CANADA



We believe in the power of décor and its ability to make up the fabric of your home.

That's why **CANVAS®** collections draw **inspiration from Canadians and the way they live.**

From on-trend furniture pieces to holiday décor and all your outdoor living essentials, **CANVAS®** makes it easy to refresh your space to reflect **your unique style and the way you live every day.**

We would love to hear from you and welcome your thoughtful feedback. Visit our website at **canadiantire.ca** to tell us about your experience, and share your photos with us using **#myCANVASstyle.**

Show us how you bring **CANVAS®** products to life. We can't wait to see!

WARRANTY INFORMATION



1-YEAR LIMITED WARRANTY*

This CANVAS® product carries a one (1) year warranty against defects in workmanship and materials. Trileaf Distribution agrees to replace the defective product free of charge within the stated warranty period, when returned by the original purchaser with proof of purchase. This product is not guaranteed against wear or breakage due to misuse and/or abuse.

PRODUCT NO. 052-6103-6

Made in China

Imported by Trileaf Distribution Trifeuil Toronto, Canada M4S 2B8

ASSEMBLY TROUBLESHOOTING



**BEFORE RETURNING
YOUR PRODUCT**

**HAVING TROUBLE?
LET US HELP YOU!**

**TOLL-FREE:
1-888-670-6684**

If you have questions regarding your product or require warranty assistance, please call our customer service helpline.



**CALL US,
WE CAN HELP**

PRODUCT TROUBLESHOOTING

PROBLEM

POSSIBLE CAUSES

SOLUTION

Bulb won't light.

1. Bulb is burned out.
2. Power is off.
3. Faulty wire connection.
4. Faulty switch.

1. Replace light bulb.
2. Make sure power supply is on.
3. Check wiring.
4. Test or replace switch.

Fuse blows or circuit breaker trips when light is turned on.

Crossed wires or power wire is grounding out.

Check wire connections.

CARING FOR YOUR ITEM

1 Clean the fixture with a soft, dry cloth.

2 Do not use any cleaners with chemicals, solvents or harsh abrasives.



CAUTION: Before attempting to clean the fixture, disconnect the power to the fixture by turning the breaker off or removing the fuse from the fuse box.

TABLE OF CONTENTS

| | | | |
|-------------------------------|---|--------------------------|----|
| Important Safety Instructions | 1 | Technical Data | 11 |
| Parts List | 2 | Assembly Troubleshooting | 12 |
| Before You Begin Assembly | 4 | Caring for Your Item | 12 |
| Electrical Installation | 5 | Warranty | 13 |
| Step-by-step Guide | 6 | | |



WARNING! CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRAND CIRCUIT CONDUCTOR.

CLEANING: Before cleaning your fixture, turn off the switch or power source. Wipe the fixture with a soft, damp cloth.


IMPORTANT: RETAIN FOR FUTURE REFERENCE, AND READ CAREFULLY.



READ INSTRUCTIONS AND REVIEW ALL DIAGRAMS BEFORE INSTALLING FIXTURE. GENERAL INSTRUCTIONS:

1. All electrical connections must be in accordance with local codes, ordinances and the Canadian Electrical Code.
2. These fixtures should be mounted on an electrical outlet box. The box must be directly supported by the building structure.
3. Turn off the circuit breaker or remove the appropriate fuse to disconnect power source before installing fixture.
4. Turning the light switch off to cut the power is not sufficient to prevent electric shock. When in doubt about the safety of any electrical installation or repair, consult a qualified electrician.

TOOLS REQUIRED



Flat-head screwdriver



Cross-head screwdriver



Stepladder



Wire strippers



Pliers



Electrical tape











Wire cutters








Safety glasses

NOTE: Do not over-drill. Be aware of over-drilling.


PARTS LIST

| ITEM | DESCRIPTION | THUMBNAIL | QUANTITY |
|------|-------------|---|----------|
| 1 | Fixture |  | 1 |
| 2 | Stem |  | 1 |
| 3 | Glass shade |  | 1 |
| 4 | Rubber ring |  | 1 |
| 5 | Washer |  | 1 |
| 6 | Nut |  | 1 |
| 7 | Cap |  | 1 |
| 8 | Knob |  | 1 |

HARDWARE LIST

| ITEM | DESCRIPTION | THUMBNAIL | QUANTITY |
|------|------------------------|---|----------|
| A | Wire connector |  | 3 |
| B | Crossbar |  | 1 |
| C | Machine screw |  | 2 |
| D | Cap nut |  | 2 |
| E | Bulb (sold separately) |  | 2 |

TECHNICAL DATA

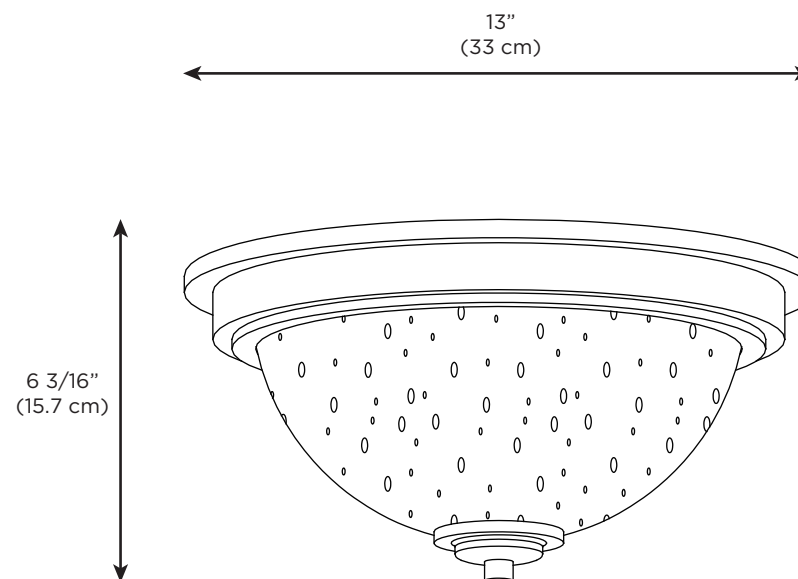


SPECIFICATIONS

| | |
|--|-------------------|
| ASSEMBLED DIMENSIONS WITHOUT BULBS (WxDxH) | 13 x 13 x 6 3/16" |
| | 33 x 33 x 15.7 cm |
| ASSEMBLED WEIGHT | 15 lb |
| | 6.8 kg |


STEP-BY-STEP GUIDE

STEP 5

Turn the power back ON and test the fixture **1**.

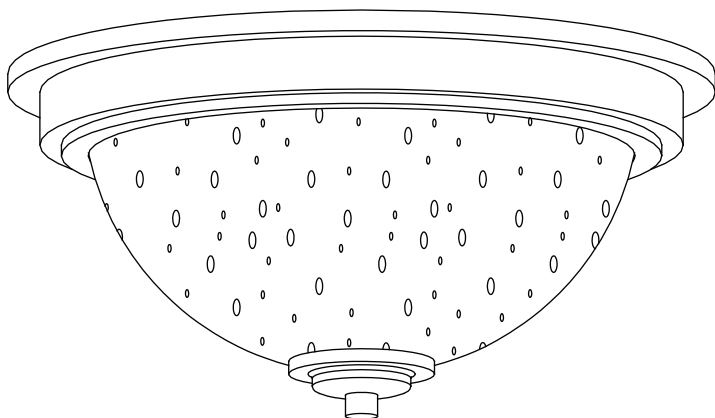


EXPLODED PARTS

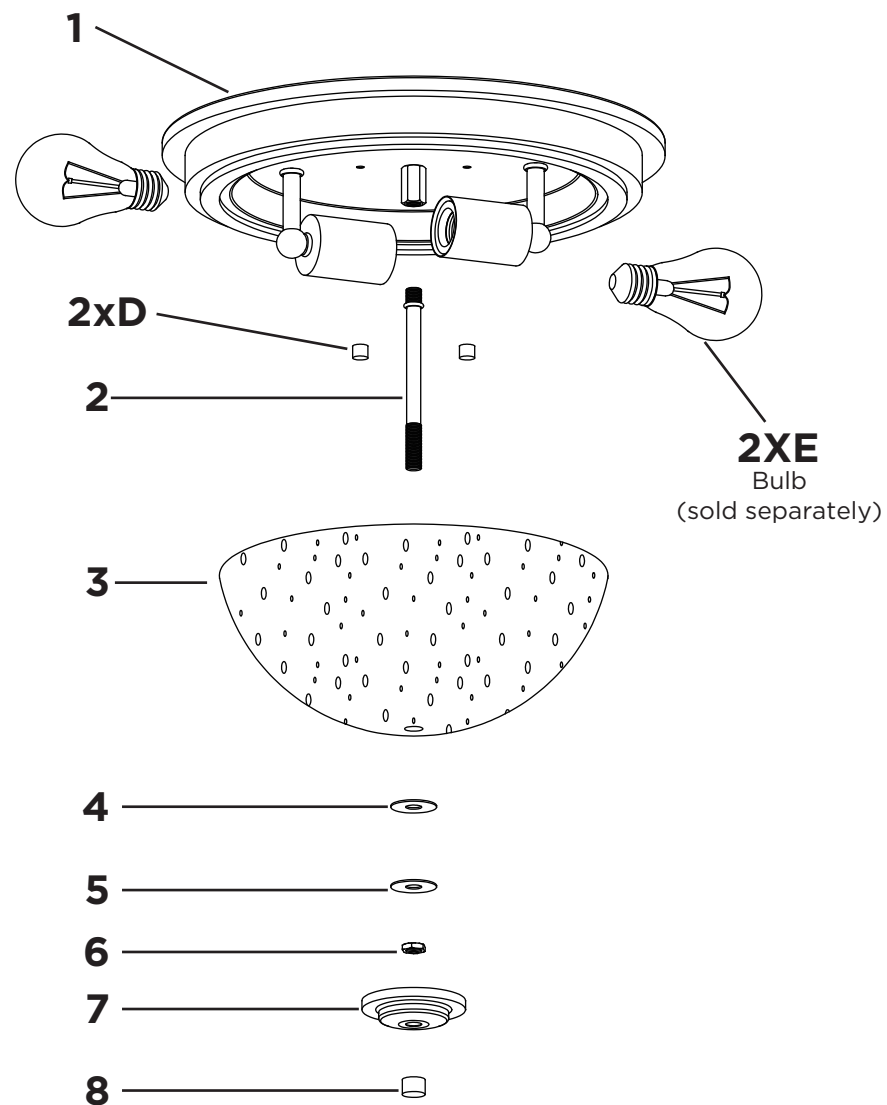

BEFORE YOU BEGIN ASSEMBLY


MAKE SURE ALL PARTS ARE PRESENT

Compare all pieces to the parts and hardware lists, and make sure you have all tools required for assembly.

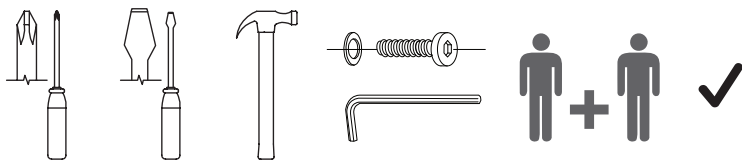


ASSEMBLE IN A CLEARED AREA

Place all parts from the box on the floor in front of you on a clean, dry, level surface to protect the product as it is being built.

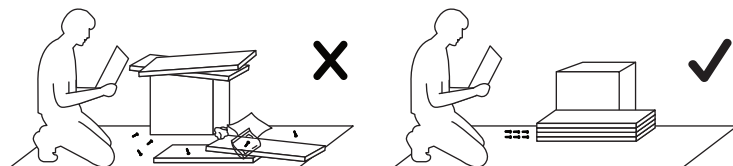


REMOVE PACKAGING MATERIALS

Place packaging materials back in the box. Do not dispose of packaging materials until assembly is complete.

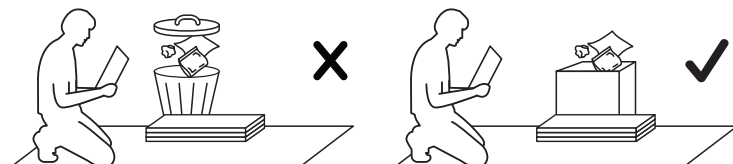

READ EACH STEP CAREFULLY

Make sure you understand each step. Or if you have any questions, contact CANVAS® customer service at 1-888-670-6684 (toll-free)

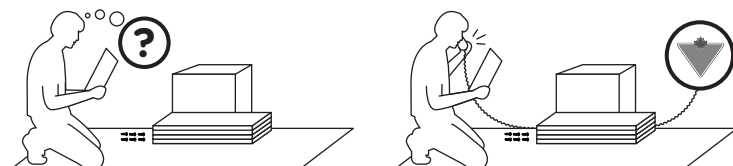


STEP-BY-STEP GUIDE

STEP 4

| | | | |
|------|------|------|------|
| 1 X1 | 2 X1 | 3 X1 | 4 X1 |
| | | | |
| 5 X1 | 6 X1 | 7 X1 | 8 X1 |
| | | | |

Remove knob **8**, cap **7**, nut **6**, washer **5** and rubber ring **4** from the stem **2**. Tighten the stem **2** into the fixture **1**. Place the glass shade **3**, rubber ring **4** and washer **5** onto the stem **2**. Tighten with nut **6** and place the cap **7** onto the stem **2**. Tighten with knob **8**.

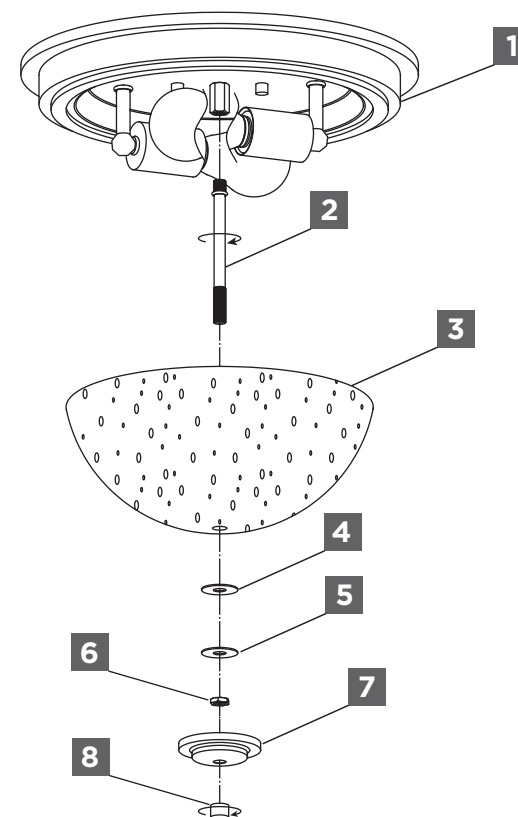


STEP-BY-STEP GUIDE

STEP 3

E X2



Screw bulbs **E** into sockets in fixture **1**.

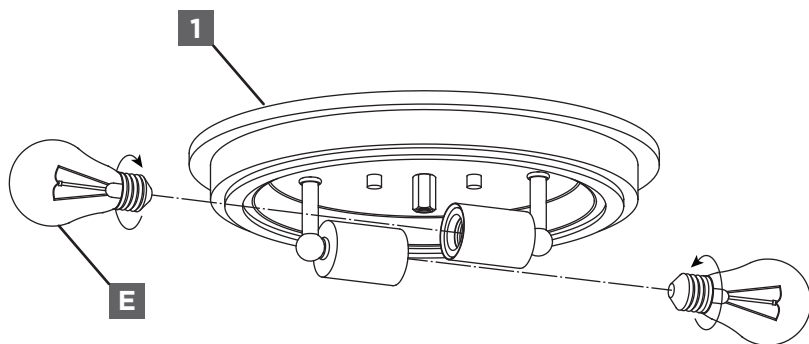


NOTE:

E26 medium-base bulbs sold separately.

ELECTRICAL INSTALLATION


STEP 1

Place the wall switch in the “OFF” position.




STEP 2

Depending on which type of fuse box you have in your home:



- Place either the main (Master) switch in the “OFF” position, cutting off power to your entire home, OR turn off the individual switch that provides power to where the fixture will be installed.



- Place either the main (Master) switch in the “OFF” position, cutting off power to the entire home, OR unscrew the fuse that provides power to where the fixture will be installed.


NOTE: Shutting off a wall switch that controls the light is not sufficient to prevent electric shock.



WARNING! CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRAND CIRCUIT CONDUCTOR.

STEP-BY-STEP GUIDE

STEP 1

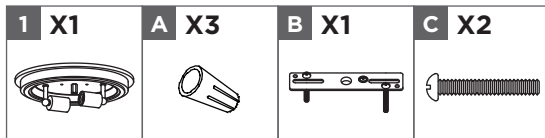


To install your new light fixture **1**, attach the white wire from the house to the white wire from the fixture **1**, using one of the included wire connectors **A**.

Then, attach the black wire from the house to the black wire from the fixture **1** the same way. Then, attach the green ground wire (or bare copper wire) from the house to the bare wire of the fixture **1**.


Tape wire connectors **A** and wires together.

Attach the crossbar **B** to the outlet box using the machine screws **C** to secure it.

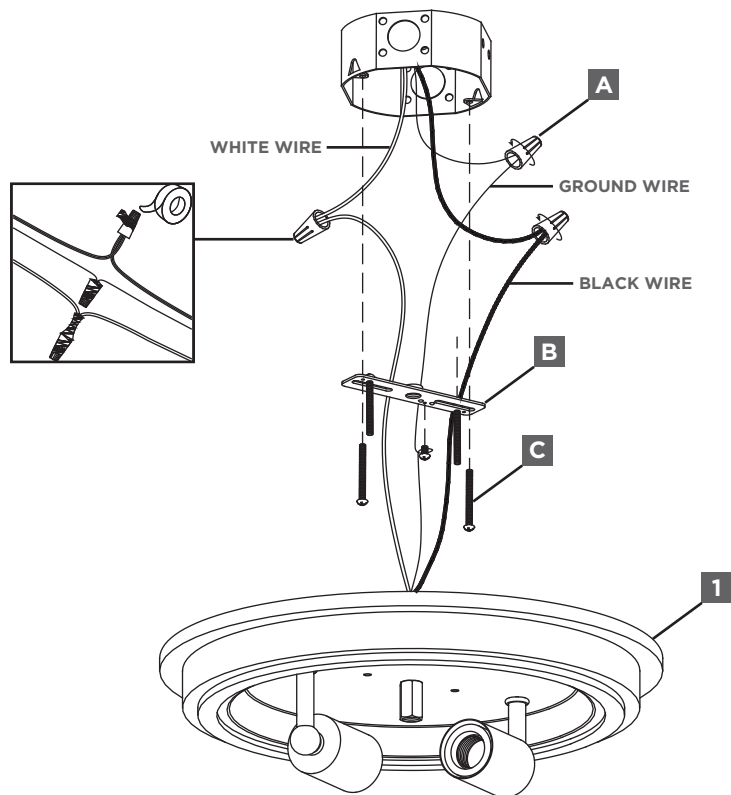

STEP-BY-STEP GUIDE

STEP 2



Put in place the canopy from the fixture **1** making sure all wires are secure inside canopy.

Screw in cap nuts **D** to secure canopy to the crossbar **B**.

