


SLIM-LINE SHOWER FILTER

Model SL2

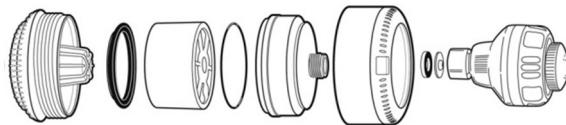

INSTALLATION

1. Unscrew existing shower head from shower arm.
2. Screw shower filter onto shower arm.
3. Screw shower head onto shower filter.
4. Do not use with a shut-off valve.

OPERATION

BEFORE ENTERING THE SHOWER

1. Activate filter by running hot water through the shower filter.
2. COOL TO DESIRED TEMPERATURE BEFORE ENTERING SHOWER.
3. Replace the filter cartridge (model SLC) every 10,000 gallons or 6 months, whichever comes first.

MAINTENANCE

1. Reverse filter cartridge periodically to ensure proper filtration performance and water flow.
2. Replace SLC filter cartridge every 10,000 gallons or 6 months, whichever comes first.

FILTER CARTRIDGE REPLACEMENT (SLC)

Replace filter cartridge every 10,000 gallons or 6 months, whichever comes first.

1. Unscrew shower filter housing.
2. Remove used filter cartridge.
3. Clean and lubricate O-rings with petroleum jelly.
4. Insert cartridge into handle.
5. Screw handle onto neck of shower head.

PERFORMANCE DATA: (Model SL2)

Rated Service Flow – 2.5 gallons per minute / 9.5 liters per minute

Rated Service Life for Free Chlorine removal – 10,000 gallons / 37,854 liters or 6 months (whichever comes first)

Maximum Working Pressure – 125 pounds per square inch / 860 kilo pascals.

Maximum Operating Temperature - 120° Fahrenheit / 49° Celsius.

- *While testing was performed under laboratory conditions. Actual performance may vary.*
- *This system is not intended to be used as a drinking water treatment unit.*
- *Both the system and installation must comply with applicable state and local regulations.*

This Sprite Shower Filtration System has been tested according to NSF/ANSI 177 for reduction of free chlorine. The concentration of free available chlorine in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 177. This system has not been evaluated for free chlorine reduction in the presence of chloramines. Free chlorine reduction performance may be impacted by the presence of chloramines in the water supply.

Notes on NSF Test Protocol:

Minimum chlorine reduction per NSF/ANSI 177 shall be listed as $\geq 50\%$ free available chlorine (FAC) when used with an influent challenge water of 2mg/L FAC. Average concentrations shall be the arithmetic mean of all reported influent challenge or product water concentrations (the detection limit value shall be used for any non-detectable concentration). The specified average percent reduction shall not be greater than the reduction calculated using the arithmetic means of the influent challenge and the product water concentrations respectively.

Sprite Industries, Inc.

1791 Railroad Street, Corona, CA 92880

Phone: 800-327-9137 Fax: 951-735-1016

Email: Solutions@SpriteShowers.com

Web: www.SpriteShowers.com



System Tested and Certified by
NSF International for the following:
NSF/ANSI Standard
for the reduction of