

SEASONAL STORAGE RACK WITH ROLLING PLATFORM CART



Model No. 068-1822-8

IMPORTANT:

Please read this manual carefully before installation and use. Save for future reference.

INSTRUCTION MANUAL



TABLE OF CONTENTS

Safety Guidelines	4
Product Dimensions	5
Component List	6
Assembly Instructions	10
Warranty	24

NOTE:

If any parts are missing or damaged, or if you have any questions, please call our toll-free helpline at 1-800-689-9928



SAVE THESE INSTRUCTIONS

This manual contains important safety and operating instructions. Read all instructions and follow them with use of this product.

model no. 068-1822-8 | contact us 1-800-689-9928

SAFETY GUIDELINES

- To reduce the risk of serious injury, read the following safety instructions before assembling and using the product.
- 2. This product is intended for domestic, indoor use only.
- 3. Assemble the unit on a hard and level surface. Never assemble on a carpet. Failure to do so can result in poor product performance or create a possible safety hazard.
- Arrange for the necessary help when assembling and moving the product. It is suggested that two people should assemble this rack.
- When using a mallet, use a cloth or wood block to protect the surface finish of the product. The mallet is NOT included in the package.
- Rivets must sit at the bottom of the keyhole slots. This is accomplished by hitting the flat section of the beam with a mallet.
- 7. Place small stable items on the top shelves. Heavier and bulkier items should be stored on the lower shelves.
- 8. Never allow children to climb or hang on shelves.
- 9. Do not stand on any part of the unit or use it as a ladder.



DANGER!

This unit should be securely mounted to a wall. Drywall anchors and wall mount brackets are included in the package (refer to page 9 for details). Serious or fatal crashing injuries can occur from furniture tipping over. To prevent this, the shelving must be secured to a wall especially in earthquake-prone environments, where surfaces are uneven, and where children and/or pets are present.


CAUTION!


Different wall materials require different types of fasteners. Use fasteners suitable for your specific type of wall. If you are uncertain about what type of fasteners to use, please contact your local hardware store.

WARNING!


Do not exceed the following evenly-distributed weight limits for this product: Total Maximum Load: 880 lb (399 kg)

Shelf Max Load: 330 lb (150 kg) each Rolling Platform Load: 220 lb (100 kg)

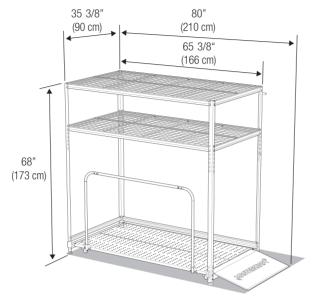


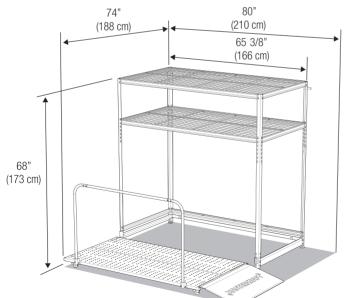


NOTE: Ensure that you have sufficient wall and floor space to use this product. Consider in advance which side you would like the ramp to be installed (left or right side). Refer to page 20 to see the options.




TOOLS REQUIRED (NOT INCLUDED):

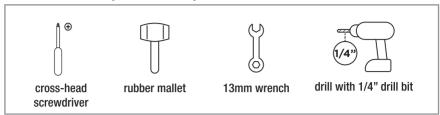

SHELF COMPONENTS

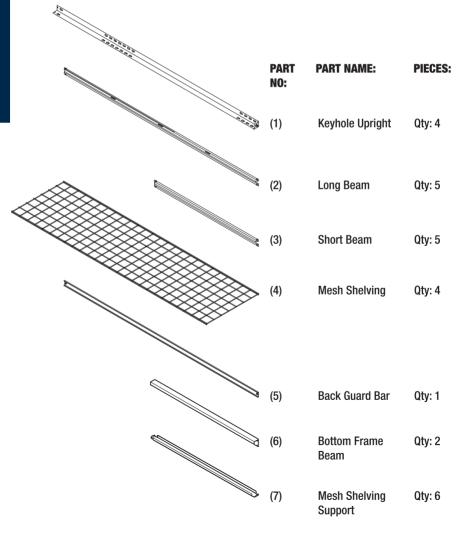

PLATFORM COMPONENTS

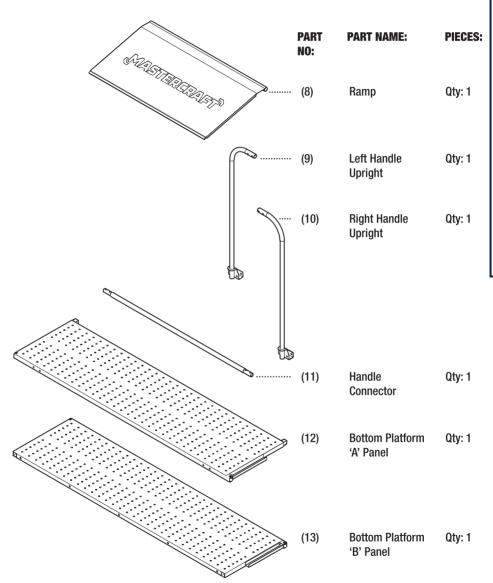

NOTE:

It is recommended that two people should assemble this product.


HARDWARE

	PART NO:	PART NAME:	PIECES:
	(14)	Castor with Brake	Qty: 2
	(15)	Castor without Brake	Qty: 2
	(16)	Middle Castor Assembly	Qty: 1
	(17)	Adjustable Foot	Qty: 4
	(18)	Guide Plate	Qty: 2
	(19)	Mesh Shelving Connector	Qty: 5
	(20)	Ramp Locking Pin	Qty: 2


HARDWARE (CONTINUED)

	PART NO:	PART NAME:	PIECES:
)	(21)	M6 Hex Bolt	Qty: 17
<u> </u>	(22)	M8 Hex Bolt (70mm)	Qty: 1
()	(23)	M6 Hex Bolt (flanged)	Qty: 7
	(24)	M8 Nut	Qty: 11
	(25)	M6 Hex Screw Post	Qty: 5
<u> </u>	(26)	M8 Hex Bolt (65mm)	Qty: 5
	(27)	M8 Hex Bolt (45mm)	Qty: 5
0	(28)	Wall Mounting Bracket	Qty: 2
(*)	(29)	Wall Mounting Anchor Screw	Qty: 3
	(30)	Drywall Anchor	Qty: 3
	(31)	M5 Hex Key	Qty: 1
	(32)	M4 Hex Key	Qty: 2
	(33)	Wheel Chock	Qty: 2


Attach an adjustable foot (17) to the bottom hole of a keyhole upright (1), and turn clockwise to tighten. Repeat the process for the remaining keyhole uprights.

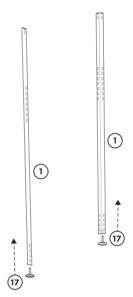


Assemble two keyhole uprights (1) with one short beam (3). With the flat face of the short beam facing up, place the rivets into the middle keyholes of the uprights. The keyhole chosen will determine the location of the lower shelf. Use a mallet to lightly tap and seat the rivets into the keyholes. Repeat by connecting another short beam to the upper keyholes of the uprights.

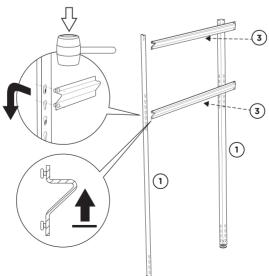


Fasten a bottom frame beam (6) to the keyhole upright (1) using the M6 bolts (23) in the bottommost keyholes of the upright.

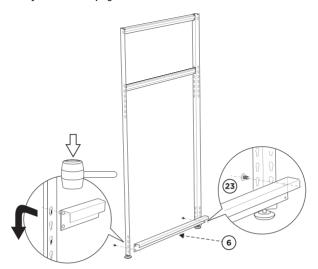

Repeat the above three steps (1.1 to 1.3) to assemble the other short side frame.

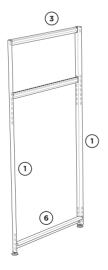




MASTERCRAFT




Hold the short side frames upright and align a long beam (2) to the rear middle keyholes of the upright (1). The position of the long beam should match those of the short beams on the uprights from step 1.2. Use a mallet to lightly tap and seat the rivets into the keyholes.

Repeat the above step to assemble three more long beams (2) to the front middle and upper corners of the short side frames as shown. Once complete, the structure should be capable of standing unsupported.

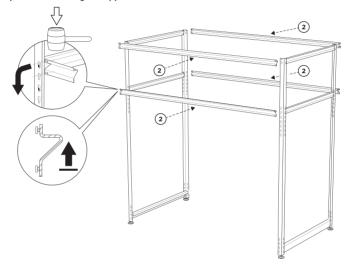


2.2

Fasten the back guard bar (5) to the two uprights using the flanged M6 hex bolts (23) and the included M5 hex key (31). Make sure the rubber bumpers are facing the inside of the structure.

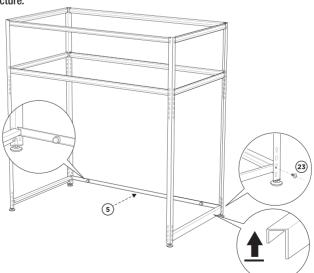


Assemble the last remaining long beam (2) in the lower rear position, using a mallet to lightly tap and seat the rivets into the keyholes.

MASTERCRAFT

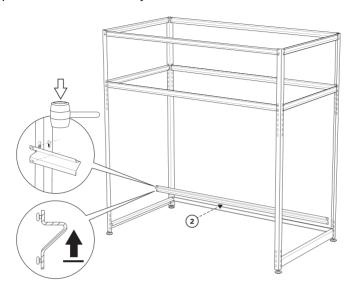


2.4


The platform ramp can be deployed either on the left or right side of the rack, depending on user preference and potential space restrictions. If a left ramp entrance is desired, fasten the remaining short beam (3) on the right hand side of the frame. If a right ramp entrance is desired, fasten the remaining short beam (3) on the left hand side of the frame.

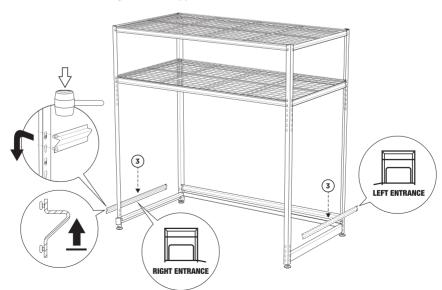

Attach the mesh shelving supports (7) into the slots found on the long beams (2). Use three mesh shelving supports for each level.

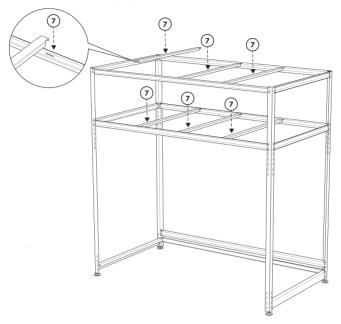

Once the mesh shelving supports (7) are in position, place the mesh shelving (4) on top, ensuring the long rods of the mesh shelving are facing down.

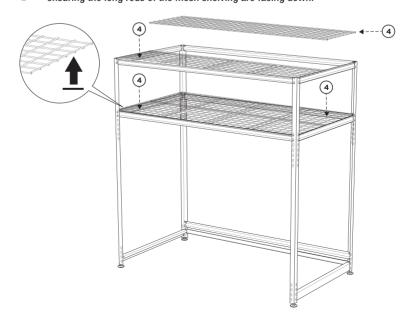

3.3


Once the mesh shelving (4) has been placed, use the mesh shelving connectors (19) to link the mesh shelving together. Use two connectors per pair of mesh shelving halves.



Assemble the guide plates (18) to the keyholes on the bottom of the uprights. Use a mallet to lightly tap and seat the rivets into the keyholes.




Place the ramp (8) in the middle of the channel on both bottom platforms (12 and 13).

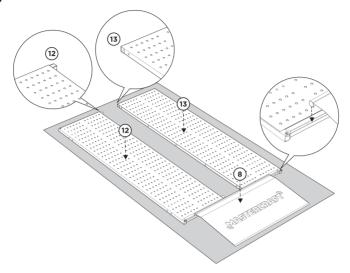


NOTE: Find a clean space and turn the bottom platforms upside down for easier assembly. Place the cardboard packaging underneath to prevent scratching of the platform.

4.2 Align the square tubes at the two ends of the platform and use a mallet to lightly tap and fit the two platform halves together.

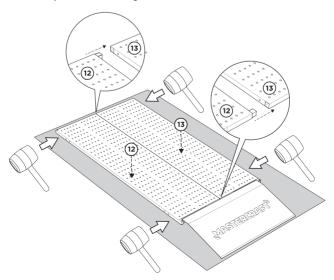


4.3

With the two halves of the platform fitted together, place the middle castor assembly (16) onto the middle of the platform. Align the holes as shown and use the M8*70mm bolt (22) and a M8 nut (24) to fasten the middle castor to the platform.

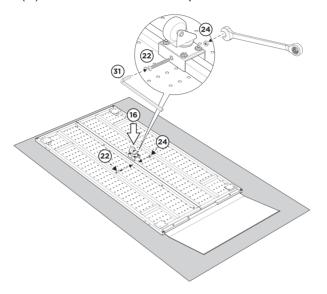

4.4


Continue fastening the two halves of the platform using the M8*65mm bolts (26) and M8 nuts (24) in the remaining holes. Use the included M5 hex key (31) and a 13mm wrench (not included) to tighten the nuts.

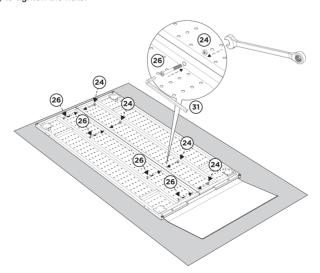


NOTE: There are three types of castors – two castors have brakes (14) and two castors do not have brakes (15). The positioning of the castors will depend on the ramp entrance side chosen.

5.1a

(Left side ramp entrance) Use M6 bolts (21) and the M5 hex key (31) to fasten the castors (14-15) to the platform. Castors with brake (14) should be at the front of the platform.

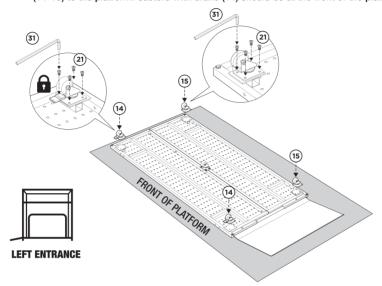


(Right side ramp entrance) Use M6 bolts (21) and the M5 hex key (31) to fasten the castors (14-15) to the platform. Castors with brake (14) should be at the front of the platform.

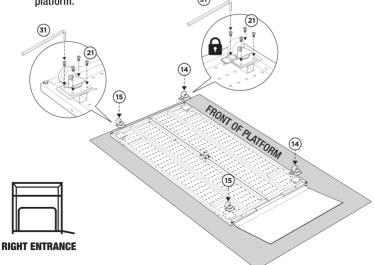


6.1

Use four M6 hex screw posts (25) along with the two included M4 hex keys (32), to assemble the left and right handle uprights (9, 10) to the handle connector (11).

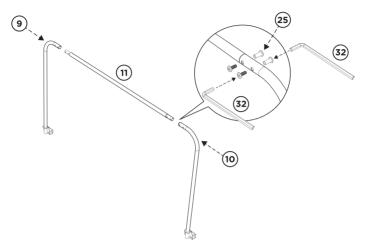


6.2


Attach the handle assembly to the platform by aligning the bottom bracket of the handle uprights to the platform, as shown. Use the M8*45mm hex bolts (27) and M8 nuts (24), as well as a 13mm wrench (not included) to fasten the handle assembly to the platform.

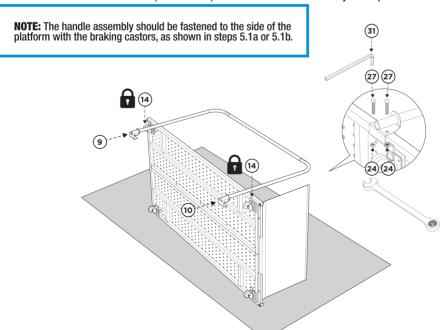



At this stage, both your shelf frame and rolling platform should be fully assembled and resemble one of the configurations below:

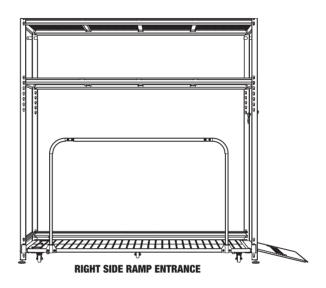

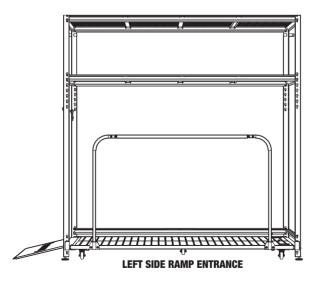




With the main structure of the seasonal storage rack close to the wall, slide the wall mounting bracket (28) onto an upright closest to the wall.

Position the seasonal storage rack such that the flat side of the wall mounting bracket (28) is flush against the wall. Mark the hole location, drill a 1/4" (6.35 mm) pilot hole and use the included drywall anchors/screws (29, 30) to fasten the seasonal storage rack to the wall.

Repeat on the other upright.

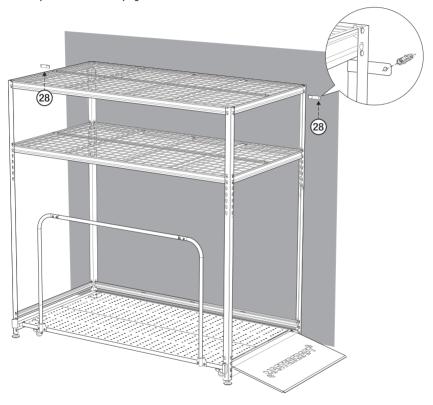


NOTE: Drywall anchors and screws are included. Different wall substrates require different types of fasteners. Use fasteners suitable for your specific wall substrate. If you are uncertain about which type of fasteners to use, contact your local hardware store.



8.1

The ramp of the rolling platform can be deployed in either the "docked" or "undocked" position. In both positions, ensure the two front castors are locked before deploying the ramp and rolling items onto or off the platform.

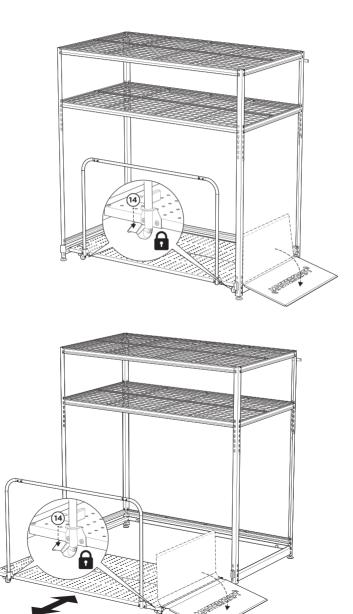




When not in use or when moving the rolling platform, ensure the ramp is in the vertical position and locked using the two ramp locking pins (20), as shown below. When the ramp is deployed, the two locking keys can be stored in the keyholes of the uprights.





Two wheel chocks (33) are included to ensure that wheeled objects do not roll when the rolling platform is mobile. Use the chocks as shown to prevent unwanted rolling.

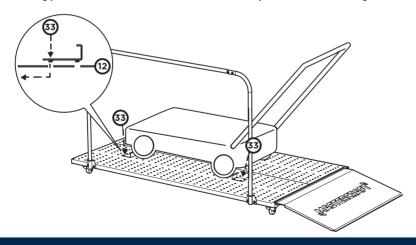

\wedge

WARNING!

Failure to use wheel chocks to secure wheeled objects during moving of rolling platform may result in serious injuries or damage. It is highly recommended to use the wheel chocks provided to secure your items in place.

model no. 068-1822-8 | contact us 1-800-689-9928

Serious or fatal crashing injuries can occur from furniture tipping over. To prevent this, the rack must be secured to a wall, especially in earthquake prone environments, where surfaces are uneven, and where children and/or pets are present.

This Mastercraft product carries a one (1) year warranty against defects in workmanship and materials. This product is not guaranteed against wear or breakage due to misuse and /or abuse.

Subject to the conditions and limitations described below, this product, if returned to us with proof of purchase within the stated warranty period and if covered under this warranty, will be repaired or replaced (with the same model, or one of equal value or specification), at our option. We will bear the cost of any repair or replacement and any costs of labour relating thereto.

Additional Limitations

This warranty applies only to the original purchaser and may not be transferred. Neither the retailer not the manufacturer shall be liable for any other expense, loss or damage, including, without limitation, any indirect, incidental, consequential or exemplary damages arising in connection with the sale, use or inability to use this product.

Notice to Consumer

This warranty gives you specific legal rights, and you may have other rights, which may vary from province to province. The provisions contained in this warranty are not intended to limit, modify, take away from, disclaim or exclude any statutory warranties set forth in any applicable provincial or federal legislation.

Imported by Mastercraft Canada Toronto, Canada M4S 2B8 Made in China