


# CANVAS<sup>TM/MC</sup>

## TAYLOR 1-LIGHT PENDANT

---

PRODUCT NO. 052-2665-2

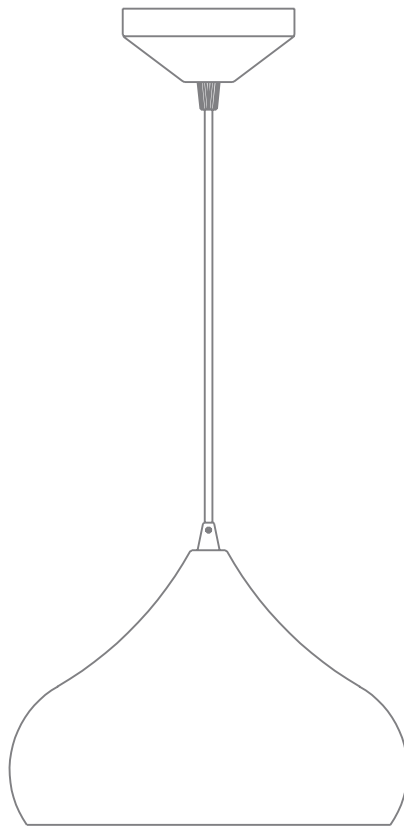

### ASSEMBLY MANUAL

Toll-free 1-888-670-6684

IMPORTANT: Please read and understand this manual before any assembly.



Table of Contents / Important Safety Instructions	3
Parts List	4
Assembly	6
Warranty	8




**READ INSTRUCTIONS AND REVIEW ALL DIAGRAMS BEFORE  
INSTALLING FIXTURE.**


**GENERAL INSTRUCTIONS:**

1. All electrical connections must be in accordance with local codes, ordinances and the Canadian Electrical Code.
1. These fixtures should be mounted on electrical outlet box. The box must be directly supported by the building structure.
2. Turn off the circuit breaker or remove the appropriate fuse to disconnect power source before installing fixture.
3. Turning the light switch off to cut the power is not sufficient to prevent electric shock. When in doubt about the safety of any electrical installation or repair, consult a qualified electrician.


## 4 PRODUCT NO. 052-2665-2

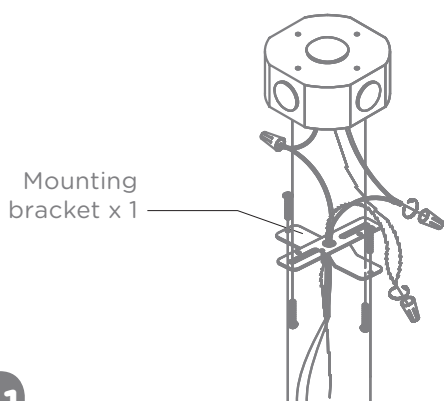**A-1**


Mounting bracket

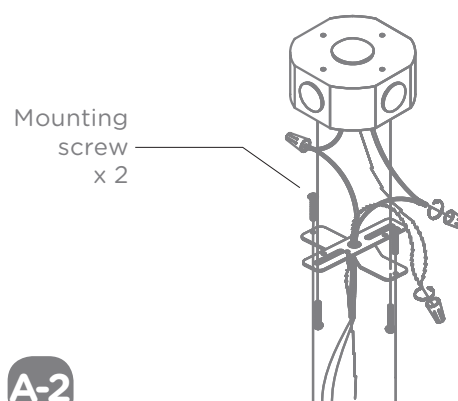**A-2**


Mounting screw

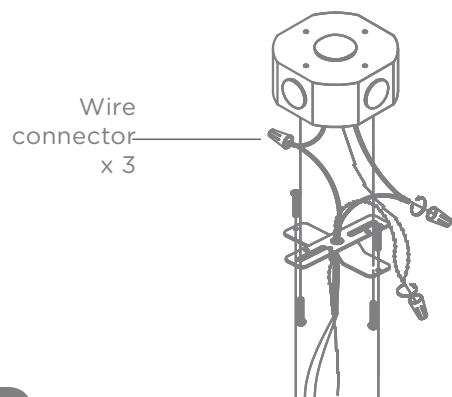**A-3**

Wire connector

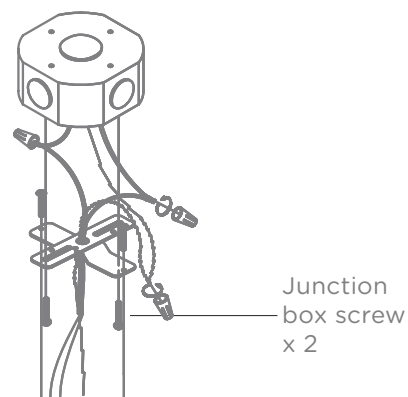**A-4**

Junction box screw

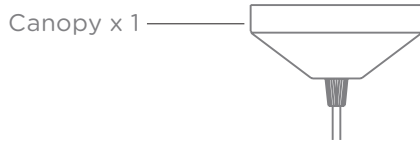


**B-1**

Canopy




**B-2**

Plastic support ring

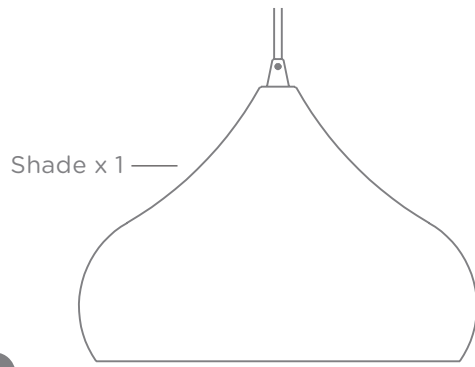

**C**

Shade



E26 medium base bulb, 60 W x 1  
(sold separately)

**D**

Bulb

## Step 1

Requires **B-1, B-2**

1. Unscrew plastic support ring **B-2**. Adjust wire length to desired height. Screw back plastic support ring **B-2** to canopy **B-1** to secure in place.

## Step 2

Requires **D**

1. Screw in bulb **D** (E26 medium base, 60 W, not included).  
DO NOT EXCEED WATTAGE.

## Step 3

Requires **A-1, A-3, A-4**

1. Place mounting bracket **A-1** over the centre of the ceiling junction box.
2. Align the holes in the mounting bracket **A-1** with the holes in the junction box and attach with 2 junction box screws **A-4**. Secure the screws with a screwdriver.
3. Gently pull the wiring down from the ceiling junction box and allow it to hang.
4. Carefully inspect the wires of the pendant lamp and the ceiling junction box. Usually, the “live” or positive (+) wire is black, the neutral wire is white and the ground wire is green.
5. Attach the live (+) wire of the pendant lamp to the live (+) wire of the junction box. Secure them together with a wire connector **A-3**, and wrap the connection with electrical tape.
6. Attach the neutral (-) wire of the pendant lamp to the neutral (-) wire of the junction box. Secure them together with a wire connector **A-3**, and wrap the connection with electrical tape.
7. Attach the ground wire of the pendant lamp to the ground wire of the junction box. Secure them together with a wire connector **A-3**, and wrap the connection with electrical tape.
8. Gently tuck the wire connections neatly into the ceiling junction box and tighten the wire.

## Step 4

Requires **A-1, A-2, B-1**

1. Push the canopy **B-1** up over the mounting bracket **A-1** until it is aligned with the ceiling. Align the holes in the canopy with the holes in the mounting bracket and secure with the mounting screws **A-2**.

**8    PRODUCT NO. 052-2665-2**

This CANVAS™ product carries a one (1) year warranty against defects in workmanship and materials. Trileaf Distribution agrees to replace the defective product free of charge within the stated warranty period, when returned by the original purchaser with proof of purchase. This product is not guaranteed against wear or breakage due to misuse and/or abuse.

Made in China

Imported by  
Trileaf Distribution Trifeuil Toronto,  
Canada M4S 2B8