


# CANVAS<sup>TM/MC</sup>

## PORTLAND COLLECTION LOVESEAT

---

PRODUCT NO. 088-1719-8

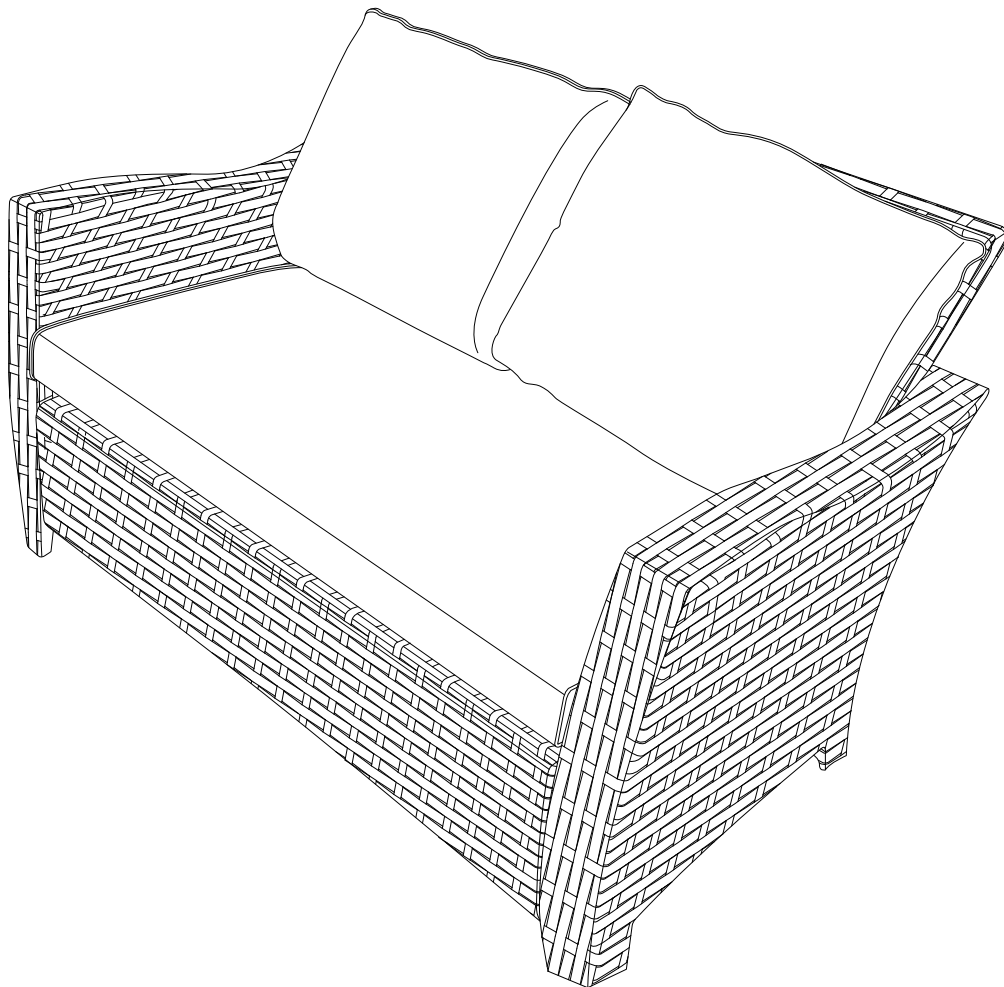

### ASSEMBLY INSTRUCTIONS

Toll-free: 1-888-670-6684

IMPORTANT: Please read this manual carefully before beginning assembly of this product.  
Keep this manual for future reference.

Table of Contents	3
Important Safety Instructions	3
Part List	4
Assembly	5-10
Cleaning and Maintenance	11
Technical Specifications	11
Warranty	12



**WARNING!**

To reduce the risk of serious injury, read the following safety instructions before assembling and using the product.



**CAUTION!**


Always keep children under close supervision while they are playing near this product. Never leave children unattended. Keep pets away while setting up the product.

- Always place the product on flat, horizontal ground.
- Any assembly or maintenance of the product must be carried out by adults only.
- Make sure there is sufficient manpower when assembling or moving the product.
- Some parts may contain sharp edges. Wear protective gloves if necessary.
- Check all screws and nuts periodically for tightness. When required, tighten them.
- Repairing and replacing parts should be done by a qualified technician.
- Do not use the product in heavy wind conditions, it could tip over and cause injuries to the user or passersby.
- Do not use the product if it is in an inverted position or if its legs do not rest completely on the ground. Failure to follow could result in serious injury.
- Never stand on the product. Failure to follow could result in serious injury.
- The product can accommodate only two persons at a time. Failure to follow could result in serious injury.
- Do not exceed the maximum load (210 Kg) of the product.
- If the product is not used for a long period (e.g. winter time), store it in a clean, dry environment.
- Do not light fire near the product.
- Retain the original packaging to store the product.

**IMPORTANT:** Retain the manual for future reference, and read the instructions carefully.


1

Left Arm Frame - 1



2

Right Arm Frame - 1




3

Back Panel - 1



4

Seat Panel - 1



5

Back Cushion - 2




6

Seat Cushion - 1



A

Screw M6 x 26 - 11



B

Screw M8 x 53 - 2




C

Washer - 22



D

Screw cap - 11




E

Screw nut - 11



F

Screw nut cover - 11



G

Hex Key - 1



H

Wrench - 1





- CAUTION!**
- Check all screws and nuts periodically for tightness. If required, tighten them.
  - Keep children and pets away during assembly. This product contains small parts which can be swallowed by them.
  - Keep fingers away from places where they can be pinched or trapped.
  - Do not attempt to assemble the product if any part is missing.




**Let us help you!**  
**DO NOT RETURN YOUR PRODUCT TO THE STORE. CALL US FIRST! 1-888-670-6684**  
If you have questions regarding your product, require warranty assistance, or have damaged or missing parts, please call our customer service toll-free helpline. Contact us for assistance, we're here to help.

**IMPORTANT:** Please read and understand this manual before assembling the product. Before beginning assembly of the product, make sure there are no missing parts. Compare the parts with the packaging contents list. If any part is missing, or if you have any questions, contact the service center at 1-888-670-6684 (toll free).

Take all parts from the packaging box and position them on a clean floor. Remove all packing materials and place them back into the box. Do not dispose of the packing materials until the assembly is complete. Read each step carefully before beginning any assembly and make sure you understand each step. If any part is missing, please call our toll-free number for assistance: 1-888-670-6684.


Needed for assembly:



Hex key (included)



Wrench (included)

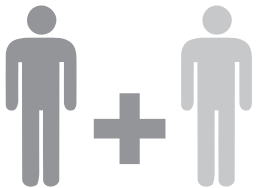


2 people

## Step 1

Requires **3, B, G**


Insert the shank of the screw (B) into the corresponding hole located on the left side of the back panel (3). Tighten the screws using the hex key (G). Repeat the same procedure on the right side of the back panel.

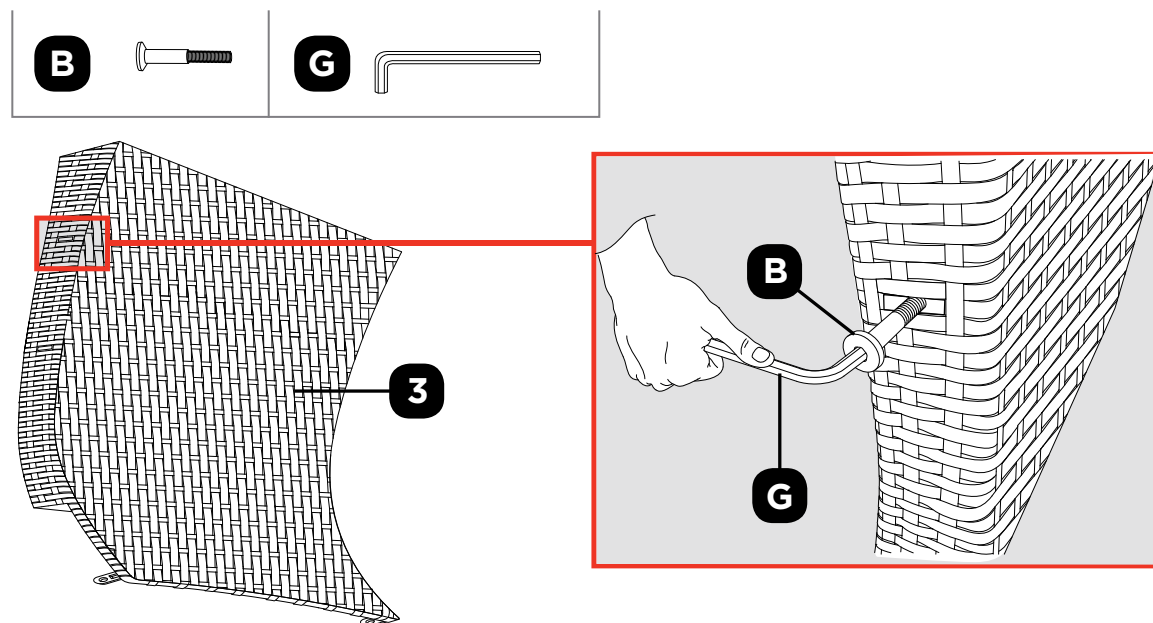

## Step 2

Requires **1, 2**


Lock the head of the screws (B) into the respective slots provided on the left arm frame (1) and the right arm frame (2).

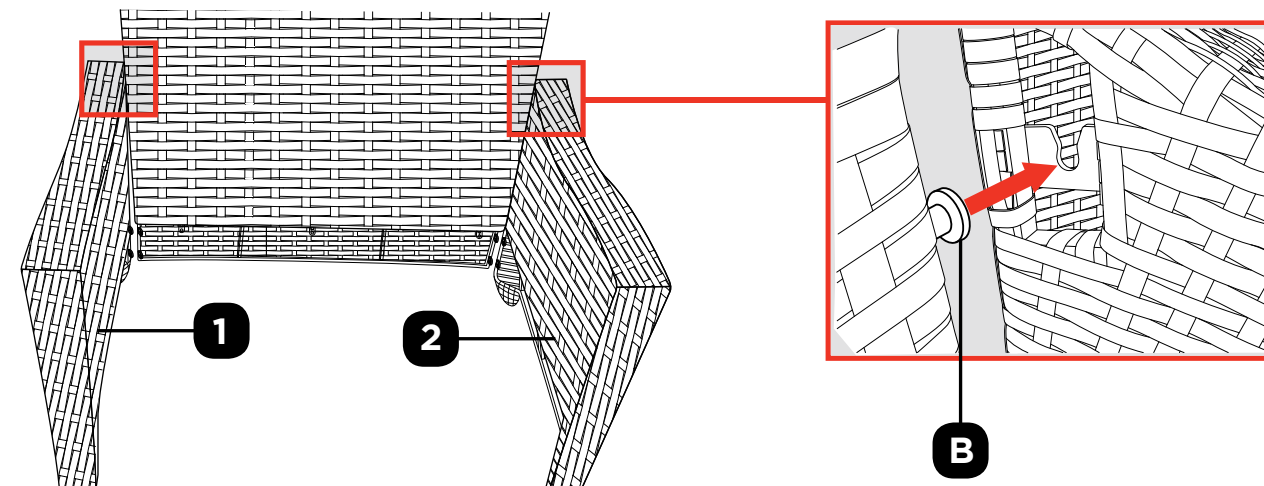

## Step 3

Requires **1, 2, 3**


Align holes located on the lower portion of the back panel (3) with the corresponding holes of the right arm frame (2). Repeat the same procedure for the left arm frame (1).

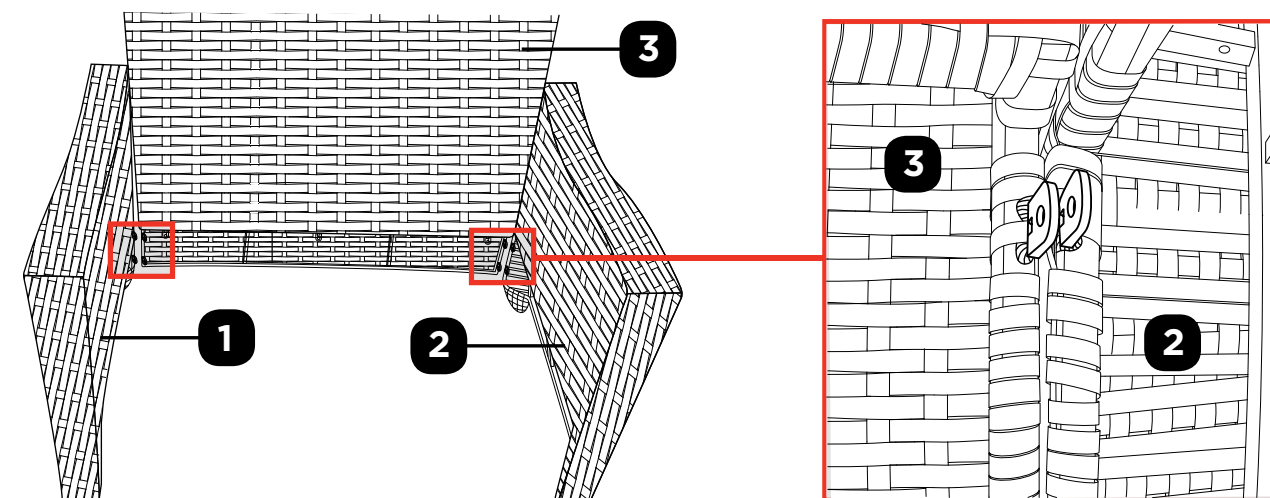

## Step 4

Requires **A, C, E, G, H**

Insert the screw (A) with one washer (C) into the aligned hole. Tighten the screw using another washer and a screw nut (E). Use the hex key (G) to firmly tighten the screw. Use the wrench (H) to secure the nut from moving. Follow the same procedure for the second screw. Repeat the same procedure for the left arm frame.

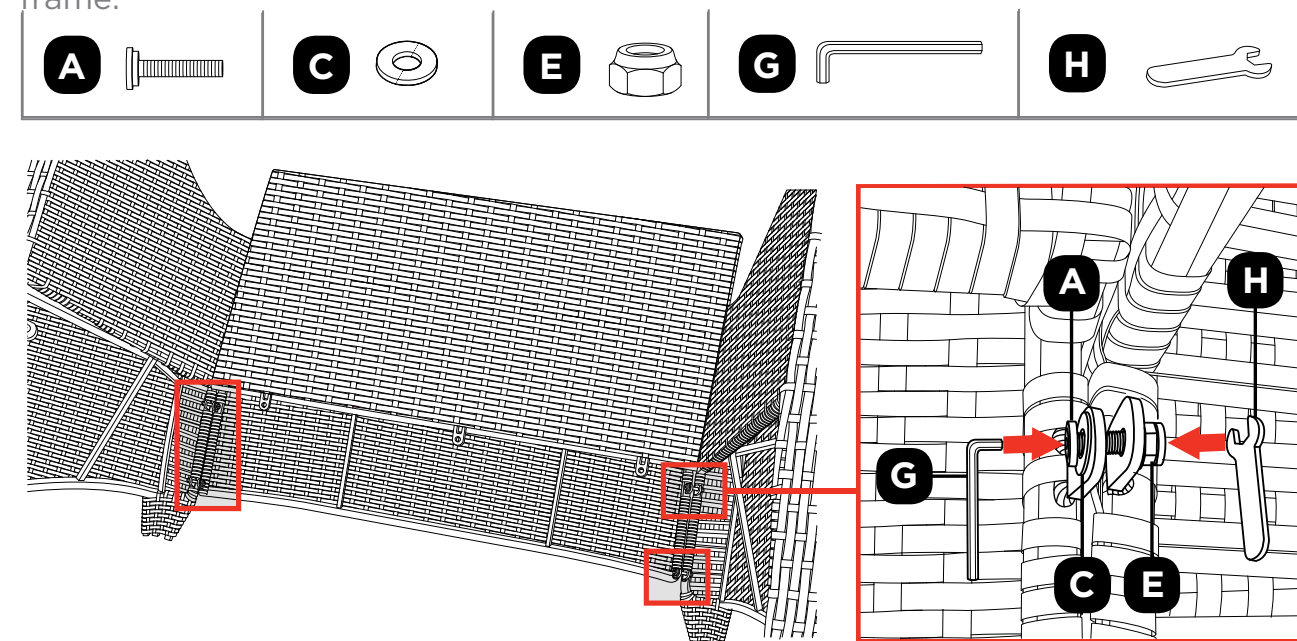


### NOTE:

Do not tighten the screws completely until all four screws are installed.




**Step 5**Requires **1, 2, 4**

Tilt the assembled panel. Align holes located on the right arm frame (2) with the corresponding holes on the front of the seat panel (4). Repeat the same procedure for the left arm frame (1).

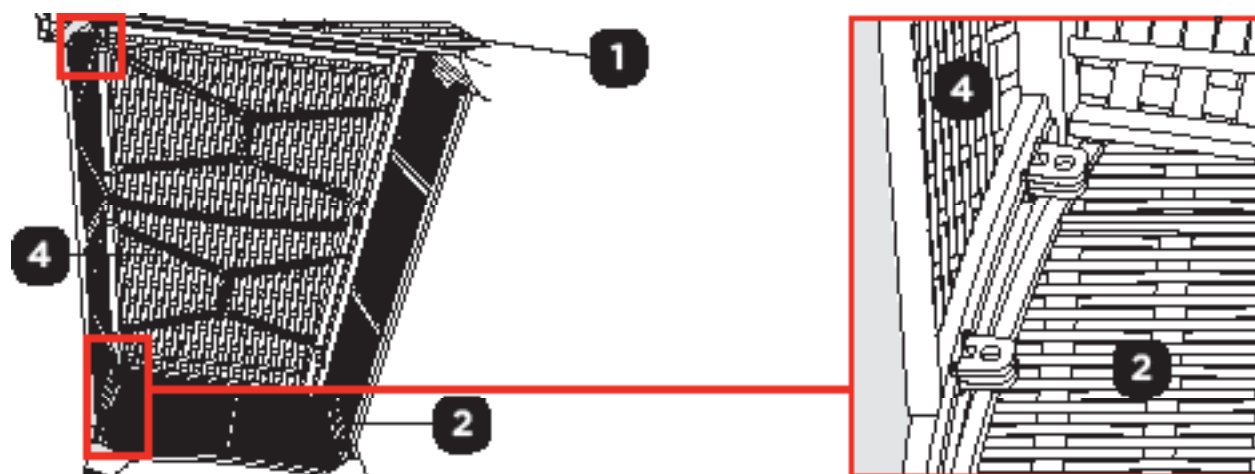**Step 6**Requires **A, C, E, G, H**


Insert the screw (A) with one washer (C) into the aligned hole. Tighten the screw using another washer and a screw nut (E). Use the hex key (G) to firmly tighten the screw. Use the wrench (H) to secure the nut from moving. Follow the same procedure for the second screw. Repeat the same procedure for the left arm frame.

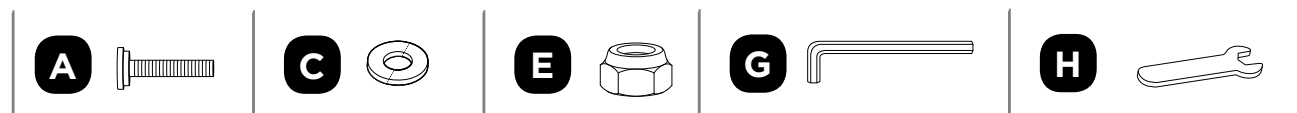**NOTE:**



Do not tighten the screws completely until all four screws are installed.

**Step 7**Requires **3, 4**

Align holes located at the rear portion of the seat panel (4) with the corresponding holes of the back panel (3).

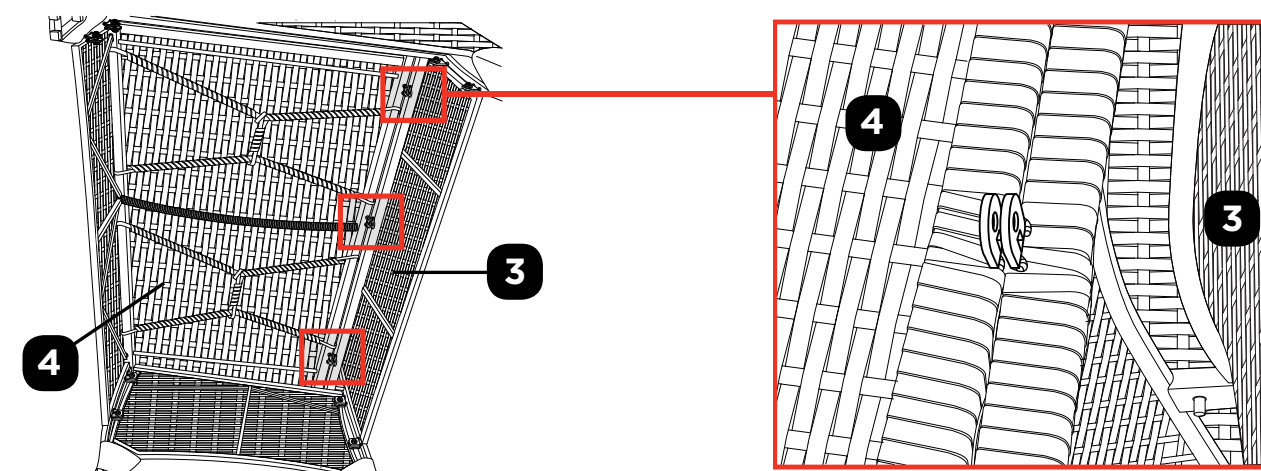**Step 8**Requires **A, C, E, G, H**

Insert the screw (A) with one washer (C) into the aligned hole. Tighten the screw using another washer and a screw nut (E). Use the hex key (G) to firmly tighten the screw. Use the wrench (H) to secure the nut from moving. Follow the same procedure for the second and third screws.

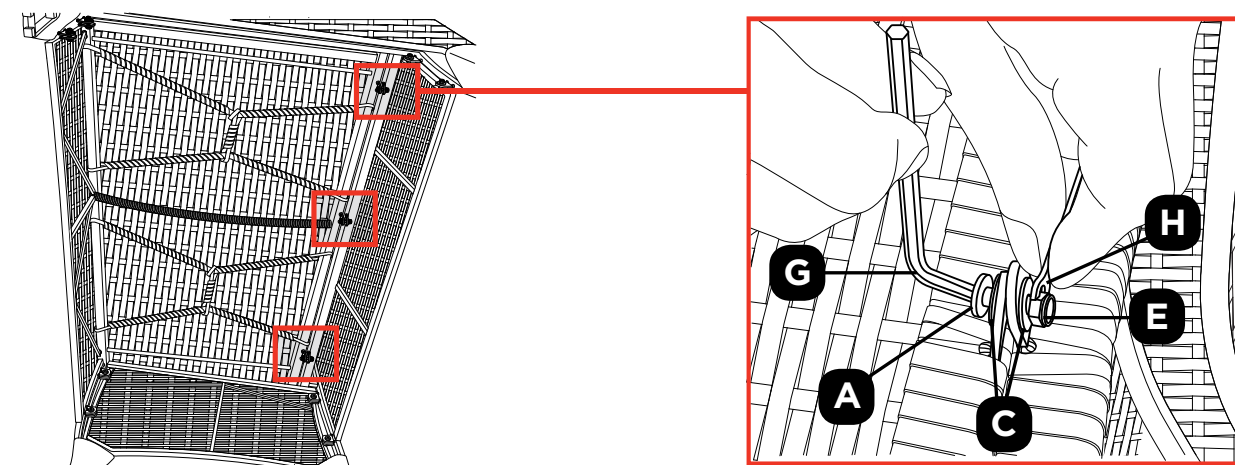
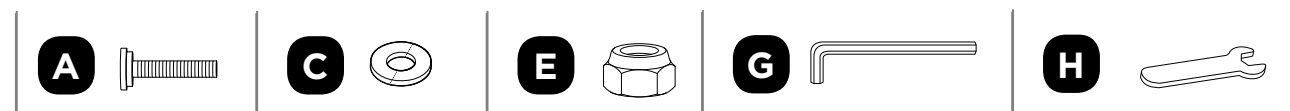
**NOTE:**

Do not tighten the screws completely until all three screws are installed.

Step 9

Requires **D, F**


After assembling all the chair parts, make sure all screws are fully tightened. Cover all screws and screw nuts using the screw caps (D) and screw nut covers (F).

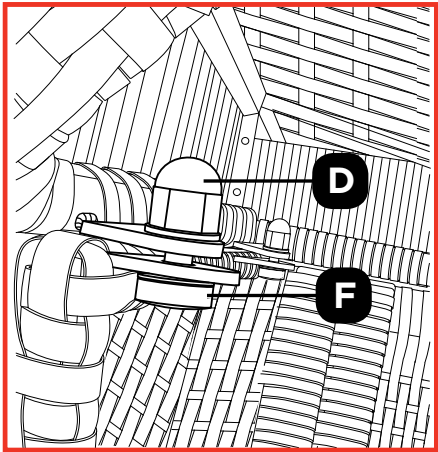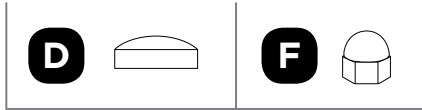

Step 10

Requires **5, 6**

Turn the chair upright. Place two back cushions (5) and one seat cushion (6) on the back panel and seat panel, respectively. The chair is ready for use.

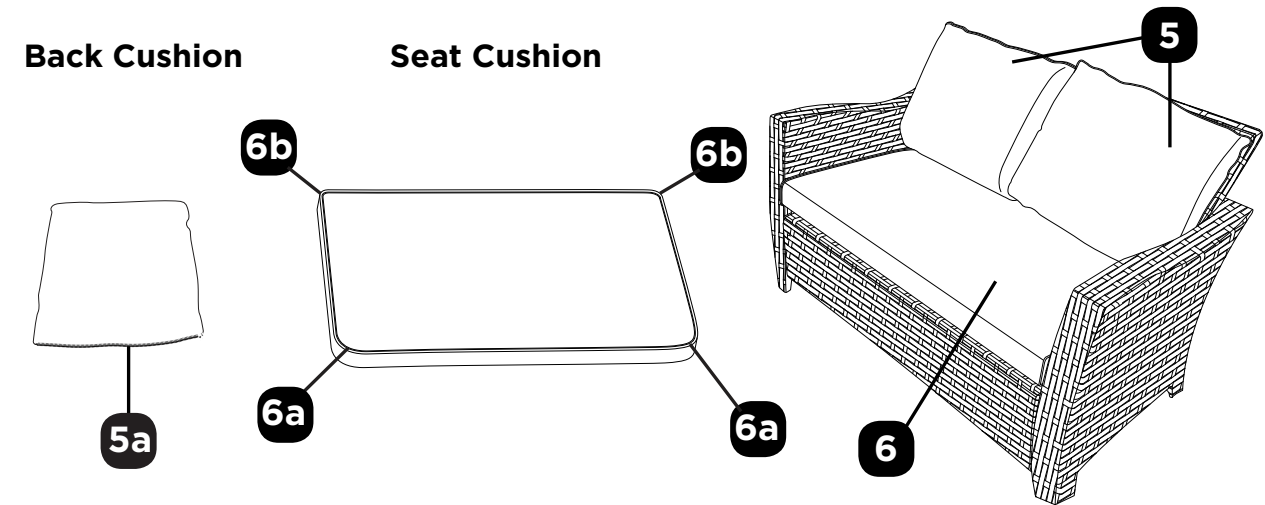

NOTE:

- When placing the back cushions, make sure that the zipper (5a) on each of the back cushions is facing downward.
- When placing the seat cushion, make sure that the circular corners (6a) of the seat cushion are facing outward and the square corners (6b) of the seat cushion are facing inward.



CAUTION!

- Check all screws periodically for tightness. If required, tighten them.
  - If required to disassemble the product, follow the assembly steps in the reverse order.
  - Fabric colour may fade after prolonged exposure to light. Keep the cushions indoors when not in use.
  - If surface oxidation (rusting) occurs and no measures are taken to correct it, the oxidation may start dripping onto the assembly surface, which may cause damaging stains that may be difficult to remove.
- 
- To wash the cushions:
    - Use a soft bristle brush to clean;
    - Always use a mild solution of soap and water. Never use detergent;
    - Rinse with clean water. The water should be cold to lukewarm, never more than 25°C (77°F);
    - Remove excess moisture from the cushions using a dry towel. Do not place in washing machine nor hand squeeze.
  - Do not use bleach, acid, or other abrasive cleaners on the product.
  - Steel components of garden accessories and furniture are treated with rust inhibiting paint. However, due to the nature of steel, surface oxidation (rusting) will occur if this protective coating is scratched. This is a natural process. To minimize this condition, it is recommended that care be taken when assembling and handling the product, in order to prevent the paint from being scratched. Surface rust can be removed easily by applying a little cooking oil.

Dimensions (L x W x H)	83 x 132 x 85 cm
	32 5/8 x 52 x 33 1/2"
Product weight	210 kg
	463 lb

**12    PRODUCT NO. 088-1719-8**

This CANVAS™ product carries a one (1) year warranty against defects in workmanship and materials. Trileaf Distribution agrees to replace the defective product free of charge within the stated warranty period, when returned by the original purchaser with proof of purchase. This product is not guaranteed against wear or breakage due to misuse and/or abuse.