# CTLD100 | BATH Ventilation



## Ventilation Fan

Quickly remove odours and humidity with our whisper quiet, Energy STAR certified high-performance fan. Equipped with a high-density polyethylene (hard rigid plastic) fan for incredibly quiet operation and longlasting durability. Our ceiling-mounted bath fan meets all cETLus safety standards and features a three speed DC motor



### **Features**

- · 3 Speed in one fan: 50 CFM / 80 CFM / 100 CFM
- · Max. 1.0 sones
- · Thermal fuse protection
- · Energy Star approved
- · Includes 4" duct connector
- Recommended for bathrooms up to 95 sqft (8' ceiling)
- · Low speed runs continuously

# Housing

· Wiring from inside or outside housing with 8" leads 26 gauge galvanized steel housing (corrosion resistant)

#### Motor

- · Includes a built in overload disconnect for safety and longer motor life
- · Includes a capacitor start motor that performs with high efficiency and long lasting reliability
- · Plug-in permanently lubricated DC motor, engineered for continuous operation







#### Installation


- · Fit any joist from Min: 12" to Max: 24" width
- · Can be mounted with flange or hanger bars
- 4" diameter duct connectors supplied
- · Heavy duty triple point mounting brackets that can be adjusted up to 24 inch joist centers without vibration
- · Premium grille is made of rugged polymeric resin for durability & comes with torsion spring clips for even mounting




Toll Free: 1-888-293-5662


# CTLD100 | BATH Ventilation



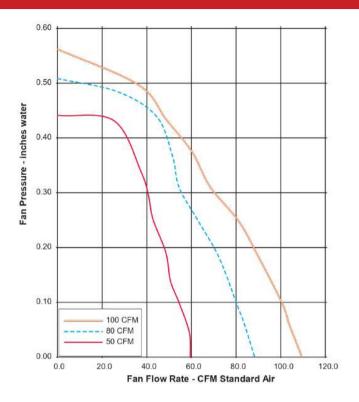

SPECIFICATIONS	CTLD100				
Static Pressure	0.1	0.1	0.1		
Noise Level (Sones)	0.3	0.4	0.7		
Air Flow Volume (CFM)	50	80	100		
Current (Amps)	0.028	0.042	0.067		
Power Consumption (Watts)	3.3	5.0	8.0		
Electrical Connection (V/Hz)	120/60				
Thermal Fuse Protection	Yes				
Motor Type	DC				
Blower Wheel	Centrifugal				
Duct Diameter	4"				

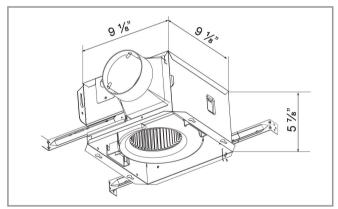

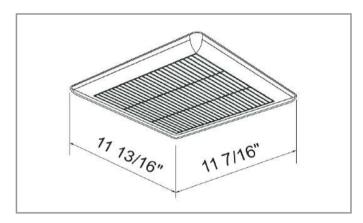

Model	Description	Packaging	Contractor Pack	Master Pack
CTLD100H	Bathroom Ventilation with Humidity Sensor	Individual	-	-