## MAXIMUM

### 4 U.S. Gallon (15.1 L)

**ULTRA QUIET Finishing Air Compressor** 



#### **IMPORTANT:**

Please read this manual carefully before using this product, and save it for reference.

INSTRUCTION MANUAL

# TABLE OF CONTENTS

23

TECHNICAL SPECIFICATIONS	4
SAFETY GUIDELINES	5
KEY PARTS DIAGRAM	8
KEY PARTS LIST	9
INTENDED USE	10
ASSEMBLY	12
OPERATING INSTRUCTIONS	14
MAINTENANCE	18
TROUBLESHOOTING	20
EXPLODED VIEW	22

#### NOTE:

**TABLE OF CONTENTS** 

PARTS LIST

WARRANTY

If any parts are missing or damaged, or if you have any questions, please call our toll-free helpline at 1-888-670-6682.



#### **SAVE THESE INSTRUCTIONS**

Keep this instruction manual for future use. Should this product be passed on to a third party, this instruction manual must be included.

TECHNICAL SPECIFICATIONS

#### **TECHNICAL SPECIFICATIONS**

RUNNING HP	1.0
TANK SIZE	4 U.S. GALLONS (15.1 L)
AIR DELIVERY (CFM*) @ 40 PSI	3.3
AIR DELIVERY (CFM*) @ 90 PSI	2.4
CUT-IN PRESSURE (PSI)	95
CUT-OUT PRESSURE (PSI)	125
PUMP DESIGN	OIL-LESS
MOTOR	INDUCTION
RPM	1700
POWER	120 V, 60 Hz, 7.5 A
WEIGHT	53 lb (24 kg)
POWER CORD	SJO 18 AWG/72" (1.83 m)

\*CFM: Cubic Feet per Minute

This manual contains information that relates to **PROTECTING PERSONAL SAFETY** and **PREVENTING EQUIPMENT PROBLEMS**. It is very important to read this manual carefully and understand it thoroughly before using the product. The symbols listed below are used to indicate this information.

#### **Safety Advice**



RISK OF FIRE OR EXPLOSION. Do not spray a flammable or combustible liquid or paint near sparks, flames, pilot lights or in a confined area. The spray area must be well-ventilated. Keep compressor at least 20' (6 m) away from spray area. Do not carry and operate the compressor or any other electrical device near the spray area. Never smoke when spraying. Use a minimum of 25' (7.6 m) of hose to connect a spray gun to the compressor.



**RISK OF ELECTRIC SHOCK.** Do not expose to rain. Store indoors. Hazardous voltage. Disconnect from power source before servicing. Compressor must be grounded. Do not use grounding adaptors.



**RISK OF BURSTING.** Make sure the regulator is adjusted so that the compressor outlet pressure is set lower than the maximum operating pressure of the spray gun or tool. Before starting the compressor, pull the ring on the safety valve to make sure the valve moves freely (see diagram on page 17). Drain water from tank after each use. Do not weld or repair tank.



**RISK OF PERSONAL INJURY.** Never spray compressed air or material at self or others.



**RISK OF BURSTING.** Check the maximum pressure rating in the manual or identification label. The compressor outlet pressure must be regulated so that it does not exceed the maximum pressure rating. Relieve all pressure in the hose before removing or attaching accessories.



RISK OF BURSTING. Do not adjust the pressure switch or safety valve for any reason. They have been preset at the factory for this compressor's maximum pressure. Tampering with the pressure switch or the safety valve may cause personal injury or property damage.

#### IMPORTANT!

Installation, operation or maintenance information that is important but not hazard related.



#### ! DANGER!

Potential hazard that will result in serious injury or loss of life



#### /!\ WARNING!

Potential hazard that could result in serious injury or loss of life.



#### **CAUTION!**

Potential hazard that may result in moderate injury or damage to equipment

SAFETY GUIDELINES

**RISK OF BURNS.** The pump and the manifold generate high temperatures. In order to avoid burns or other injuries, do not touch the pump, the manifold or the transfer tube while the compressor is running. Allow the parts to cool down before handling or servicing. Keep children away from the compressor at all the times.



**RISK OF BREATHING.** Be certain to read all labels when you are spraying paints or toxic materials, and follow all safety instructions. Use a respirator mask if there is a chance of inhaling anything you are spraying. Also, NEVER directly inhale the air produced by a compressor.



**RISK OF EYE INJURY.** Wear ANSI Z87.1 approved safety goggles when using an air compressor. Do not point any nozzle or sprayer toward a person or any part of the body. Serious injury may occur if the spray penetrates the skin.

#### <u>^\</u>

#### **WARNING!**

- Pull the pressure safety valve ring every day in order to ensure that the valve is functioning properly.
- The compressor must be located in a well-ventilated area for cooling, and must be a minimum of 12" (31 cm) away from the nearest wall.
- Protect the air hose and the power cord from damage and puncture. Inspect them for weak or worn spots every week, and replace them if necessary.
- Always wear hearing protection when using an air compressor. Failure to do so may result in hearing loss.
- Do not carry the compressor while it is running.
- Do not operate the compressor if it is not in a stable position.
- Do not operate the compressor on a rooftop or an elevated position that could allow the unit to fall or be tipped over.
- Always replace a damaged gauge before operating the unit again.

#### **Extension cords**

As the distance from the supply outlet increases, you must use a heavier gauge extension cord. Using extension cords with inadequately sized wire causes a serious drop in voltage, resulting in loss of power and possible product damage. Refer to the table here to determine the required minimum wire size.

#### Recommended Minimum Wire Gauge for Extension Cords\* (120 V)

AMPERE	CORD SIZE IN AWG (AMERICAN WIRE GAUGE)					
RATING		Extension cord length				
	25' (7.6 m)	50' (15 m)	75' (23 m)	100' (30 m)	150' (46 m)	200' (60 m)
0 – 5	16	16	16	14	12	12
5.1 – 8	16	16	14	12	10	_
8.1 – 12	14	14	12	10	_	_
12.1 – 15	12	12	10	10	_	_
15.1 – 20	10	10	10	_	_	_


<sup>\*</sup> Based on limiting the line voltage drop to five volts at 150% of the rated amperes.

The smaller the gauge number of the wire, the greater the capacity of the cord. For example, a 14 gauge cord can carry a higher current than a 16 gauge cord. When using more than one extension cord to make up the total length, be sure each cord contains at least the minimum wire size required.


#### **Guidelines for using extension cords**

- If you are using an extension cord outdoors, be sure it is marked with the suffix "W-A"("W" in Canada) to indicate it is acceptable for outdoor use.
- Ensure your extension cord is properly wired and in good electrical condition. Alway replace a
  damaged extension cord or have it repaired by a qualified technician before using it.
- Protect your extension cords from sharp objects, excess heat, and damp or wet areas.

**KEY PARTS LIST** 

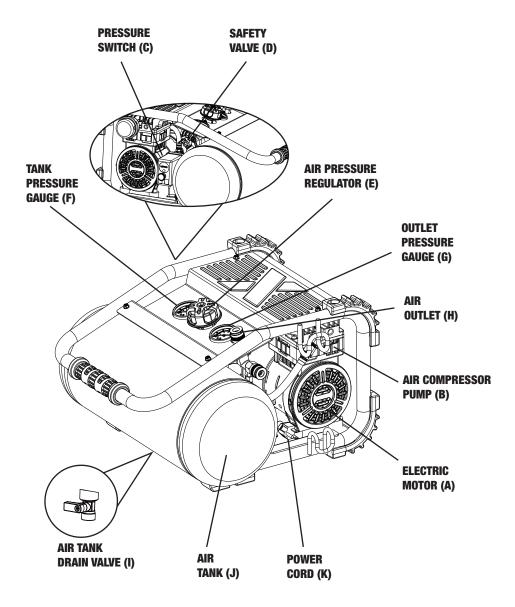

- **A. ELECTRIC MOTOR:** The motor is used to power the pump. It is equipped with a thermal overload protector. If the motor overheats for any reason, the thermal overload protector will shut it down in order to prevent the motor from being damaged.
- **B. AIR COMPRESSOR PUMP:** The pump compresses the air and discharges it into the tank via the piston that moves up and down in the cylinder.
- **C. PRESSURE SWITCH:** This switch turns the compressor on and off. It is operated manually, and when it is in the ON position it allows the motor to start if the pressure in the air tank is below the factory set cut-in pressure, and it causes the motor to stop if the pressure in the air tank reaches the factory set cut-off pressure. Be sure to set this switch to the OFF position when the compressor is not being used and before unplugging the compressor.
- **D. SAFETY VALVE:** This valve is used to prevent system failure by draining pressure from the system when it reaches a preset level if the pressure switch has not shut down the motor. It will pop open automatically, or it can be activated manually by pulling the ring on the valve.
- **E. AIR PRESSURE REGULATOR:** The regulator is used to adjust the pressure inside the line to the tool that is being used. Turn the knob clockwise to increase the pressure and counter-clockwise to decrease the pressure.
- **F. TANK PRESSURE GAUGE:** The gauge measures the pressure level of the air that is stored in the tank. It cannot be adjusted by the operator and it does not indicate the pressure inside the line.
- **G. OUTLET PRESSURE GAUGE:** The gauge measures the regulated outlet pressure.
- **H. AIR OUTLET:** The outlet is connected to the 1/4" (6.4 mm) NPT air hose.
- **I. AIR TANK DRAIN VALVE:** The drain valve is used to remove moisture from the air tank after the compressor is shut off.
- **J. AIR TANK:** The tank is where the compressed air is stored.
- **K. POWER CORD:** This compressor should be used on a nominal 120 V grounded circuit. Use a power cord that is equipped with a grounding plug. Verify that the compressor is plugged into an outlet that has the same configuration as the plug. Do not use an adaptor with this compressor.





#### **WARNING!**

Do not exceed the tool's maximum working pressure.



#### **WARNING!**

Do not attempt to open the drain valve when there is more than 10 PSI of air pressure in the tank.

INTENDED USE

#### **Before you start**

This MAXIMUM<sup>™</sup> Ultra Quiet Finishing Air Compressor is ideal for a wide range of applications from fastening to greasing and engine cleaning. The 4 gallon (15.1 L) design provides optimum pressure. It features an oil-free pump and uses a 1.0 HP induction motor for powerful operation.

The procedures described in this manual are solely for this 4 gallon (15.1 L) air compressor at a maximum pressure of 125 PSI. The device has been designed/constructed for household use only.

#### Compatible compressor and air tool: proper usage and operation

Always ensure the use of appropriately-matched air tools with your MAXIMUM<sup>TM</sup> Ultra Quiet Finishing Air Compressor. Be sure that the air compressor being used can supply the appropriate volume, pressure and delivery rate of air to the tool(s) without running continuously. Using tools, or combinations of tools together or separately, that require more than the air compressor can deliver will void the air compressor guarantee/warranty.

Tool Compatib	oility Chart			
Air Tool		Operates Tool Continuously	Operates Tool Intermittently	Not Recommended Utilisation
<del>}</del>	Inflation/Recreation	•		
V-3	Finishing Nailer (16-gauge)	•		
<b>_</b>	Framing Nailer			
Ø	Flooring Nailer		•	
•	Die Grinder Angle Grinder Air Ratchet		•	
	Cut-off Tool			
	Paint Sprayer			
	Brad Nailer (18-gauge)	•		
	3-in-1 Brad/Finishing/Stapler	•		
	Roofing Nailer			
	Impact Wrench			
	Drill Hammer Chisel Shears		•	
8	Sander Polisher			
	Grease/Caulking Gun		•	

#### **WARNING!**

This air compressor is not designed for continuous operation or unlimited commercial operations and may be used in dry areas only. This air compressor is intended to be used in maximum 30-minute intervals and should rest for 30 minutes before being used again. Do not exceed the maximum working time.

**ASSEMBLY** 

#### **Assembly**


**1.** Unpack the air compressor. Inspect the unit for damage. If the unit has been damaged, contact the retailer immediately.

#### THE CARTON SHOULD CONTAIN:

- Air compressor.
- · Owner's manual.
- **2.** Check the air compressor's identification label to ensure that you have purchased the intended model and that it has the required pressure rating for its intended use.


#### 3. Positioning of the air compressor:

- a. Position the air compressor near an electrical outlet.
- b. The compressor must be at least 12" (31 cm) from any wall or obstruction, in a clean, well-ventilated area to ensure sufficient air flow and cooling.
- c. Place the air compressor on the floor or a hard, level surface. The air compressor must be level to ensure proper drainage of the moisture in the tank.



#### 4. Connect air hose to compressor.


• Connect air hose (not provided) to the compressor's air outlet (H).




OPERATING INSTRUCTIONS

#### **Breaking-in the pump**


1. Set the pressure switch (C) to the OFF position.



**2.** Open the tank drain valve (I) by turning it counter-clockwise to permit the air to escape and prevent air pressure build-up in the air tank during the break-in period.




**3.** Turn the air pressure regulator (E) clockwise until it stops.




**4.** Plug in the power cord (K).

**5.** Set the pressure switch (C) to the ON position. The compressor will start. Run the compressor for 30 minutes. If it fails, turn it off immediately and call the toll-free helpline at: 1-888-670-6682. Please note that breaking-in the unit is only required prior to first use.



- **6.** After 30 minutes, turn off the pressure switch (C).
- 7. Close the tank drain valve (I) by turning it clockwise.



**8.** Set the pressure switch (C) to the ON position. The air tank will fill to "cut-out" pressure and then the compressor's motor will stop. The compressor is now ready for use.

**NOTE:** A circuit breaker is recommended. If the air compressor is connected to a circuit protected by a fuse, use dual-element time delay fuses (type "T" only).



#### **CAUTION!**

Use a dedicated circuit

For best performance and reliable starting, the air compressor should be plugged into a dedicated circuit, as close as possible to the fuse box or circuit breaker.

The compressor will use the full capacity of a typical 12 A household circuit. If any other electrical devices are drawing from the compressor's circuit, the air compressor may fail to start. Low voltage or an overloaded circuit can result in sluggish starting that causes the motor overload protection system or circuit breaker to trip, especially in cold conditions.

**OPERATING INSTRUCTIONS** 

#### **Before each start-up**


- **1.** Set the pressure switch (C) to the OFF position.
- 2. Turn the air pressure regulator knob (E) counter-clockwise until it stops.
- 3. Attach hose and accessories.

#### **How to start**

- 1. Close the tank drain valve (I).
- 2. Plug in the power cord (K).
- **3.** Set the pressure switch (C) to the ON position and allow tank pressure to build. Motor will stop when tank pressure reaches "cut-out" pressure.
- 4. Turn the air pressure regulator knob (E) clockwise until desired pressure is reached.
- **5.** The compressor is ready for use.

#### How to shut down

- 1. Set the pressure switch (C) to the OFF position.
- 2. Unplug the power cord (K).
- **3.** Reduce the pressure in the tank through the outlet hose. Pulling the safety valve (D), and keeping it open, will also reduce the pressure in the tank.

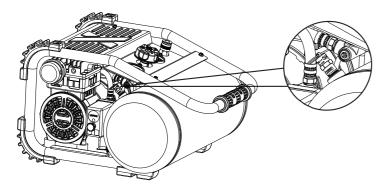



#### **WARNING!**

Risk of bursting. Too much air pressure causes a hazardous risk of bursting. Check the manufacturer's maximum pressure rating for air tools and accessories. The regulator outlet pressure must never exceed the maximum pressure rating.



#### **WARNING!**

If the pump has been transported or turned upside down (even partially), allow the pump to sit in a normal, upright position for approximately 10 minutes before starting.




#### **WARNING!**

High temperatures are generated by the electric motor and the pump. To prevent burns or other injuries, DO NOT touch the air compressor while it is running. Allow it to cool before handling or servicing. Keep children away from the air compressor at all times.

#### **Horizontal / Vertical Use Option**

1. This unit can be used vertically if needed. It is recommended to use the unit in a horizontal position.

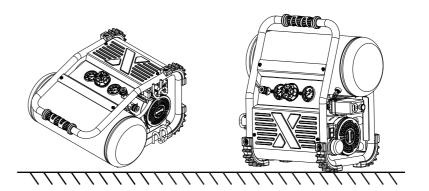



#### **CAUTION!**

Escaping air and moisture can propel debris that may cause eye injury. Wear safety goggles when opening the drain valve.



#### **WARNING!**

To avoid personal injury, always shut off and unplug the unit, and relieve all air pressure from the system before performing any service on the air compressor.



#### **WARNING!**

Risk of unsafe operation. Unit cycles automatically when power is on. When performing maintenance you may be exposed to voltage sources or compressed air. Disconnect power source from the compressor and bleed off all air pressure.

**MAINTENANCE** 

ITEM	DESCRIPTION/REASON	SERVICE INTERVAL
Drain the tank	Through normal operation of your air compressor, condensation water will accumulate in the tank. To prevent corrosion of the tank from the inside, condensation must be drained at the end of every workday. Be sure to wear protective goggles. Relieve the air pressure in the system, then open the drain valve on the bottom of the tank to drain. In cold conditions it is especially important to drain the tank after each use to reduce the chance of problems resulting from the freezing of condensation water.	Daily
Oh a al c tha a	NOTE: Refer to instructions on how to drain tank (page 19).	
valve	Pull/activate the safety valve daily to ensure that it is operating properly and to clear the valve of any possible obstructions.	Daily
Clean the air filter	A dirty air filter will reduce air compressor performance and life. To avoid contaminating the pump, the filter should be cleaned frequently and replaced on a regular basis. Clean the foam filter by immersing it in warm, soapy water. Dry thoroughly after.	Weekly
Test for leaks	Check that all connections are tight. Small leaks in the tank, hoses, connections or transfer tubes will substantially reduce the air compressor and tool performance. Spray a small amount of soapy water around the area of suspected leaks with a spray bottle. If bubbles appear, repair, replace or reseal the faulty component. Do not over-tighten any connections.	Monthly
Storage	Before storing the air compressor, do the following:  • Drain tank (page 19).  • Use an air blow gun to clean all dust and debris from the compressor.  • Disconnect and wind up the power cord.  • Clean the ventilation openings on the motor enclosure with a damp cloth.  • Drain all moisture from the tank.  • Pull the pressure safety valve to release all pressure from the tank.  • Cover the entire unit to protect it from moisture and dust.  • Store the air compressor in a clean and dry location.  • In cold weather, store the compressor in a warm building when it is not in use. This will reduce problems related to starting the motor and the freezing of water condensation.	Prior to storing

#### To check safety valve.

• Before starting compressor, pull the ring on the safety valve (D) to make sure that the safety valve operates freely. If the valve is stuck or does not operate smoothly, contact a trained service technician.



#### To drain tank.

- 1. Set the pressure switch (C) to the OFF position.
- **2.** Unplug the power cord (K).
- 3. Turn air pressure regulator (E) counter-clockwise to set the outlet pressure to zero.
- 4. Pull and hold ring on safety valve (D), allowing air to bleed from the tank until air pressure is minimized
- 5. Place suitable container under unit to catch water.
- **6.** Slightly tilt unit and turn drain valve (I) counter-clockwise to open.
- 7. After the water has been drained, close the drain valve (I) (clockwise). The air compressor can now be stored.

**NOTE:** Allow unit to cool before draining tank. Drain valve (I) becomes hot during operation.

**NOTE:** Troubleshooting problems may have similar causes and solutions.

**NOTE:** Disconnect the electrical plug and disconnect any tools from air supply before attempting any adjustment.



#### WARNING!

Risk of bursting. If the safety valve does not work properly, over-pressurization may occur causing air tank rupture or an explosion.



#### **WARNING!**

Risk of bursting. Water will condense in the air tank. If not drained water will corrode and weaken the air tank causing a risk of air tank rupture.



#### WARNING!


If any of the following symptoms appear while operating the product, stop using the product immediately or serious personal injury could result. Only an authorized service centre should perform repairs on this product.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSES	SOLUTIONS
	The power cord is not plugged in.	Plug the power cord into a grounded outlet.
	The pressure switch is in the OFF position.	Set the power switch to the ON position.
	The extension cord is the wrong wire gauge or is too long.	Check extension cord information (page 7) for the proper wire gauge and cord length.
	The motor's thermal overload protection has tripped.	Turn the air compressor off, unplug the power cord and wait until the motor has cooled down. Plug in the power cord only after the motor has cooled down, and wait at least 5 minutes to make sure the thermal overload protector has recovered.
The motor will		Replace the fuse or reset the circuit breaker.
not run or start.		Verify that the fuse has the proper amperage
	A fuse has blown or a circuit breaker has been tripped.	Check for low voltage conditions.
	bi eaker nas been uippeu.	Disconnect any other electrical appliances from the circuit or operate the compressor on a dedicated circuit.
	The air tank pressure exceeds the preset pressure switch limit.	The motor will start automatically when the tank pressure drops below the cut-in pressure.
	The safety valve is stuck open.	Clean or replace the safety valve.
	Electrical connections are loose.	Have the compressor serviced by a qualified technician.
	The motor, capacitor, or safety valve is defective.	Have the compressor serviced by a qualified technician.
The motor runs continuously when the pressure switch is in the ON position.	The pressure switch does not shut off the motor when the air compressor reaches the cut-out pressure and the safety valve activates.	Set the pressure switch to the OFF position. If the motor does not shut off, unplug the air compressor. If the pressure switch is defective, replace it.
	The compressor's capacity is not enough.	Check the air requirements of the accessory that is being used. If it is higher than the CFM (Cubic Feet per Minute and pressure supplied by the compressor, page 4), a larger capacity air compressor is needed. Most accessories are rated at 25% of actual CFM while running continuously.

PROBLEM	POSSIBLE CAUSES	SOLUTIONS
The regulator does not regulate the pressure.	The regulator or its internal parts are dirty or damaged.	Replace the regulator.
	There is a leak at one of the fittings.	Check the fittings with soapy water. Tighten or reseal leaking fittings (apply plumber's tape on threads). Do not over-tighten.
The pressure is	The tank drain valve is open.	Close the drain valve.
low or there is not enough air.	The air intake is restricted.	Clean or replace the air filter element.
	Prolonged excessive use of air.	Decrease the amount of air used.
	There is a hole in the air hose.	Check the air hose and replace it if necessary.
	The tank leaks.	Replace the tank immediately. Do not attempt to repair it.
	The valve is leaking.	Check for worn parts and replace them if necessary.
There is moisture in the discharge air.	There is condensation in the air tank caused by a high level of atmospheric humidity or because the air compressor has not been running long enough.	Drain the air tank after each use. Drain the air tank more often in humid weather and use an air-line filter.
The	The ventilation is inadequate.	Relocate the compressor to an area with cool, dry and well-circulated air.
compressor overheats.	Cooling surfaces are dirty.	Clean all cooling surfaces on the pump and the motor thoroughly.
	The valve is leaking.	Replace worn parts and reassemble using new plumber's tape.

**EXPLODED VIEW** 

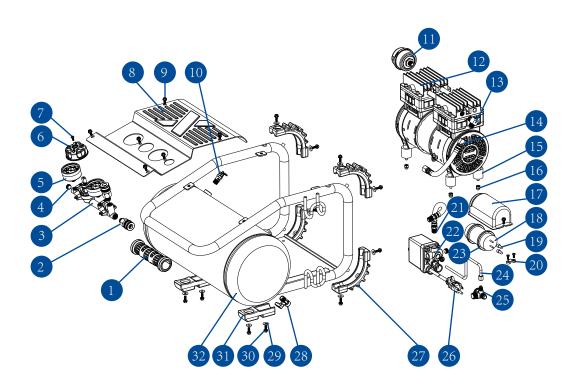

NO.	DESCRIPTION	QTY
1	Handle grip	1
2	Quick coupler	2
3	Regulator	1
4	Plug	3
5	Pressure gauge	2
6	Regulator knob	1
7	Screw M4x10	3
8	Control panel	1
9	Bolt M5x12	2
10	Safety valve	1
11	Air filter	1
12	Pump/motor assembly	1
13	Elbow	1
14	Transfer tube	1
15	Rubber foot	4
16	Nut M6	4

NO.	DESCRIPTION	QTY
17	Capacitor cover	1
18	Capacitor	1
19	Connector	2
20	Wire fixing	1
21	Rubber hoses	1
22	Pressure switch	1
23	Capacitor holder	2
24	Bleeding tube	1
25	Check valve	1
26	Power cord	1
27	Rubber pad I	4
28	Drain valve	1
29	Washer Φ5	12
30	Self-tapping screw M5x14	18
31	Rubber pad II	2
32	Air tank	1

If any parts are missing or damaged, or if you have any questions, please call our toll-free helpline at 1-888-670-6682.

WARRANTY

#### **3-Year Limited Warranty**

This MAXIMUM product is guaranteed for a period of 3 years from the date of original retail purchase against defects in workmanship and materials.

Subject to the conditions and limitations described below, this product, if returned to us with proof of purchase within the stated warranty period and if covered under this warranty, will be repaired or replaced (with the same model, or one of equal value or specification), at the sole discretion of the Maximum Canada authorised repair centre ("Service Provider"). We will bear the cost of any repair or replacement and any costs of labour relating thereto.



#### These warranties are subject to the following conditions and limitations:\*

- A. A bill of sale verifying the purchase and purchase date must be provided;
- B. Defects in workmanship and material to be assessed and determined by the Service Provider;
- C. This warranty will not apply to any product or part thereof which is worn or broken or which has become inoperative due to abuse, misuse, accidental damage, neglect or lack of proper installation, operation or maintenance (as outlined in the applicable owner's manual or operating instructions);
- D. This warranty does not apply to normal wear and tear or to expendable parts or accessories (including hose attachments and filters) that may be supplied with the product that by their nature have a limited life span and are expected to become inoperative or unusable after a reasonable period of use;
- E. This warranty will not apply to routine maintenance and consumable items such as, but not limited to, fuel, lubricants, vacuum bags, blades, belts, sandpaper, bits, fluids, rubber o-rings, tune-ups or adjustments;
- F. This warranty excludes the following components that may accompany your product:
  - (1) The carrying case, which is only for a period of 1-year from the date of original retail purchase against defects in workmanship and materials.
  - (2) Accessories, including hose attachments and filters, which do not carry a warranty of any kind.
- G. This warranty will not apply where damage is caused by repairs made or attempted by others (i.e. persons not authorized by the manufacturer), and any such unauthorized repairs or attempted repairs shall void this warranty in its entirety;
- H. This warranty will not apply to any parts other than original parts, except to the extent that the retailer or manufacturer or persons authorized by either of them have repaired or replaced them;

- I. This warranty will not apply to any product that was sold to the original purchaser as a reconditioned or refurbished product (unless otherwise specified in writing);
- J. This warranty will not apply to any product or part thereof if any part from another manufacturer is installed therein or any repairs or alterations have been made or attempted by unauthorized persons;
- K. This warranty will not apply to normal deterioration of the exterior finish, such as, but not limited to, scratches, dents, paint chips, or to any corrosion or discolouring by heat, abrasive and chemical cleaners;
- L. This warranty will not apply to component parts sold by and identified as the product of another company, which shall be covered under that product manufacturer's warranty, if any;
- M. Any products replaced by the retailer in attempt to fulfill warranty obligations is subject to the original product warranty conditions and related time period as initiated by the original date of purchase; if product is purchased in Quebec, the warranty term will be extended for a period equal to the time during which the Quebec retailer possesses the product in attempt to fulfill warranty obligations; replaced product will not default to new product warranty conditions;
- N. The retailer and manufacturer's sole obligation and the purchaser's sole remedy under this warranty shall be as set out herein. The warranties contained herein are not transferable and are given only to the purchaser. FURTHER, THE WARRANTIES SET OUT HEREIN ARE IN LIEU OF ALL OTHER WARRANTIES OR CONDITIONS, WHETHER EXPRESS, IMPLIED OR STATUTORY (INCLUDING SUCH AS ARISE UNDER THE SALE OF GOODS ACT OR THE INTERNATIONAL SALE OF GOODS ACT), ARISING OUT OF A COURSE OF DEALING OR USAGE OF TRADE OR OTHERWISE, INCLUDING, SUBJECT TO APPLICABLE LAW, ANY IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY, MERCHANTABLE QUALITY, FITNESS OR ADEQUACY FOR A PARTICULAR PURPOSE OR USE, AND ALL OTHER SUCH WARRANTIES ARE EXPRESSLY DISCLAIMED BY THE RETAILER AND MANUFACTURER.

#### **Additional Limitations**

This warranty applies only to the original purchaser and may not be transferred.

This warranty applies for a period of 3 years from the date of original retail purchase, as indicated on the bill of sale.

Neither the retailer, Maximum Canada, nor the manufacturer shall be liable for any other expense, loss or damage, including, without limitation, any indirect, incidental, consequential or exemplary damages arising in connection with the sale, use or inability to use this product.

Under no circumstances shall the retailer, Maximum Canada, or manufacturer be liable to the purchaser for any claim for (a) indirect, special, punitive, incidental, exemplary, or consequential damages, (b) compensation for loss of profits, anticipated revenue, savings or goodwill, or other economic loss of the purchaser, (c) exemplary, aggravated or punitive damages howsoever incurred, (d) contribution or set-off in respect of any claims against the purchaser, (e) any damages whatsoever relating to third party products or services or the purchaser's materials, or (f) any damages whatsoever relating to interruption, delays, errors or omissions; in each case under any theory of law or equity, arising out of or in any way related to this warranty, even if advised of the possibility thereof.

Notwithstanding any provision herein or entitlement of the purchaser at law, in equity or otherwise, in no event shall the liability of the retailer or manufacturer under this warranty, whether in contract, tort, product liability or otherwise, exceed, in the aggregate, the amount paid by the purchaser to the retailer for the product to which this warranty applies.

#### \* Notice to Consumer

This warranty gives you specific legal rights, and you may have other rights, which may vary from province to province. The provisions contained in this warranty are not intended to limit, modify, take away from, disclaim or exclude any statutory warranties set forth in any applicable provincial or federal legislation.

In addition to the 3-Year Limited Warranty, this MAXIMUM product is covered by our:

#### 1-Year Repair Warranty

Maximum Canada will maintain this product and replace critical parts which have worn beyond reasonable use through normal use of such product, any time during the first year after purchase.

The following are excluded from this 1-Year Repair Warranty:

- a) Missing or damaged parts or components that are a result of abuse or misuse;
- b) Any wear and tear to non-critical parts or accessories that do not affect the core function of the product.

#### **90-Day Satisfaction Guarantee**

If you are not completely satisfied with the performance of your MAXIMUM product for any reason, you can return it within 90 days from the date of purchase with proof of purchase for exchange or a full refund.

Made in China

Imported by MAXIMUM Canada Toronto, Canada M4S 2B8