

CHAMPION

POWER EQUIPMENT™

OWNER'S MANUAL & OPERATING INSTRUCTIONS



3,000 lb. WINCH



MODEL NUMBER
100124

SAVE THESE INSTRUCTIONS

Important safety instructions
are included in this manual.

MADE IN CHINA
REV 100124-20160606

12039 Smith Ave.
Santa Fe Springs CA 90670
USA / 1-877-338-0999
www.championpowerequipment.com

Have questions or need assistance?

Do not return this product to the store!

WE ARE HERE TO HELP!

Visit our website:

www.championpowerequipment.com


for more info:

- Product Info & Updates
- Tech Bulletins
- Frequently Asked Questions
- Product Registration

– or –

Call our Customer Care Team Toll-Free at:

1-877-338-0999

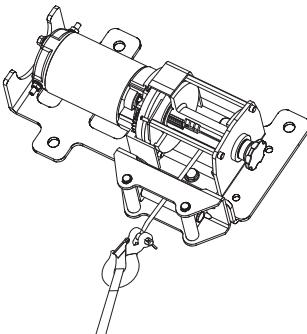

3,000 lb. **WINCH**

TABLE OF CONTENTS

Introduction	1	Maintenance	10
Introduction	1	Lubrication	10
Manual Conventions	2	Cable Assembly Replacement	10
Safety Rules	3	Troubleshooting	11
Controls and Features	5	Specifications	12
Winch	5	Performance Specifications	12
Assembly	6	Parts Diagram	13
Assembling the Winch	6	Parts List	14
Mounting the Winch	6		
Plate Mount	6		
Mobile	6		
Operation	7		
General Tips for Safe Operation	7		
Self Recovery	7		
Winching Techniques A-Z	8		
Floating Winching Technique	9		

INTRODUCTION

Introduction

Congratulations on your purchase of a Champion Power Equipment product. Champion Power Equipment and Champion Engine Technology designs, builds, and supports all of our products to strict specifications and guidelines. With proper product knowledge, safe use, and regular maintenance, this product should bring years of satisfying service.

Every effort has been made to ensure the accuracy and completeness of the information in this manual, and we reserve the right to change, alter and/or improve the product and this document at any time without prior notice.

Since CPE/CET highly value how our products are designed, manufactured, operated and are serviced, and also highly value your safety and the safety of others, we would like you to take the time to review this product manual and other product materials thoroughly and be fully aware and knowledgeable of the assembly, operation, dangers and maintenance of the product before use. Fully familiarize yourself, and make sure others who plan on operating the product fully familiarize themselves too, with the proper safety and operation procedures before each use. Please always exercise common sense and always error on the side of caution when operating the product to ensure no accidents, property damage, or injury occurs. We want you to continue to use and be satisfied with your CPE/CET product for years to come.

Record the model and serial numbers as well as date and place of purchase for future reference. Have this information available when ordering parts and when making technical or warranty inquiries.

Champion Power Equipment Support	
1-877-338-0999	
Model Number	
100124	
Serial Number	
Date of Purchase	
Purchase Location	

This manual uses the following symbols to help differentiate between different kinds of information. The safety symbol is used with a key word to alert you to potential hazards in operating and owning power equipment.

Follow all safety messages to avoid or reduce the risk of serious injury or death.

DANGER

DANGER indicates an imminently hazardous situation which, if not avoided, ***will*** result in death or serious injury.

CAUTION

CAUTION used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, ***may*** result in property damage.

WARNING

WARNING indicates a potentially hazardous situation which, if not avoided, ***could*** result in death or serious injury.

CAUTION

CAUTION indicates a potentially hazardous situation which, if not avoided, ***may*** result in minor or moderate injury.

NOTE

If you have questions regarding your winch, we can help. Please call our help line at **1-877-338-0999**

SAFETY RULES

⚠ WARNING

Read this manual thoroughly before operating your winch. Failure to follow instructions could result in serious injury or death.

⚠ WARNING

Do not exceed the rated capacity.

⚠ DANGER

Do not use this winch for lifting or moving people or animals.

⚠ DANGER

Keep yourself and others a safe distance to the side of the cable when under tension.

⚠ DANGER

Never step over a cable or near a cable under load.

⚠ WARNING

The wire rope may break before the motor stalls. For heavy loads at or near rated capacity, use a pulley block/snatch block to reduce the load on the wire rope.

⚠ WARNING

Do not move the vehicle to pull a load (towing) on the winch cable. This could result in cable breakage.

⚠ WARNING

Do not use the winch to secure or hold a vehicle for a long period of time. Do not use the winch to secure a vehicle for transport.

⚠ WARNING

Disconnect the remote control and battery leads when not in use.

⚠ WARNING

Avoid “shock loads” by using the control switch intermittently to take up the slack in the wire rope. “Shock loads” can far exceed the rate capacity for the wire rope and drum.

Do not accelerate your vehicle while winching. Loss of traction can cause a shock load on the cable.

⚠ CAUTION

Use hook strap when handling the hook for spooling or unspooling the wire rope.

⚠ WARNING

Pull only on areas of the vehicle as specified by the vehicle manufacturer.

⚠ WARNING

When re-spooling the cable, ensure that the cable spools in the under-wind position with the cable entering the drum from the bottom, not the top.

To re-spool correctly, and while wearing gloves, keep a slight load on the cable while pushing the remote button to draw in the cable. Walk toward the winch not allowing the cable to slide through your hands. Do not let your hands get within 30 cm (12 in.) of the winch while re-spooling. Turn off the winch and repeat the procedure until a few feet of cable are left. Disconnect the remote control and finish spooling by rotating the drum by hand with the clutch disengaged. Keep hands clear of the fairlead and drum while the winch is under power .

⚠ WARNING

Do not use as a hoist. Do not use for overhead lifting.

⚠ CAUTION

Use gloves to protect hands when handling the cable. Never let the cable slide through your hands.

⚠ CAUTION

Do not wrap the cable around any object and hook it back onto itself.

⚠ CAUTION

Duration of winching pulls should be kept as short as possible.

If the motor becomes uncomfortably hot to the touch, stop winching immediately and let it cool down for a few minutes. Do not pull for more than one minute at or near the rated load.

⚠ CAUTION

If the motor stalls, do not maintain power to the winch.

Electric winches are designed and made for intermittent use and should not be used in constant duty applications.

⚠ CAUTION

Apply blocks to the wheels of the vehicle when on an incline.

⚠ CAUTION

Never release the free-spool clutch when there is a load on the winch.

⚠ WARNING


Batteries contain acid and produce explosive gases.

Keep sparks, flames and cigarettes away from batteries at all times. Wear safety glasses and protect the eyes at all times. Do not lean over the batteries during operation.

CONTROLS AND FEATURES

Read this owner's manual before operating your winch. Familiarize yourself with the location and function of the controls and features. Save this manual for future reference.


Winch

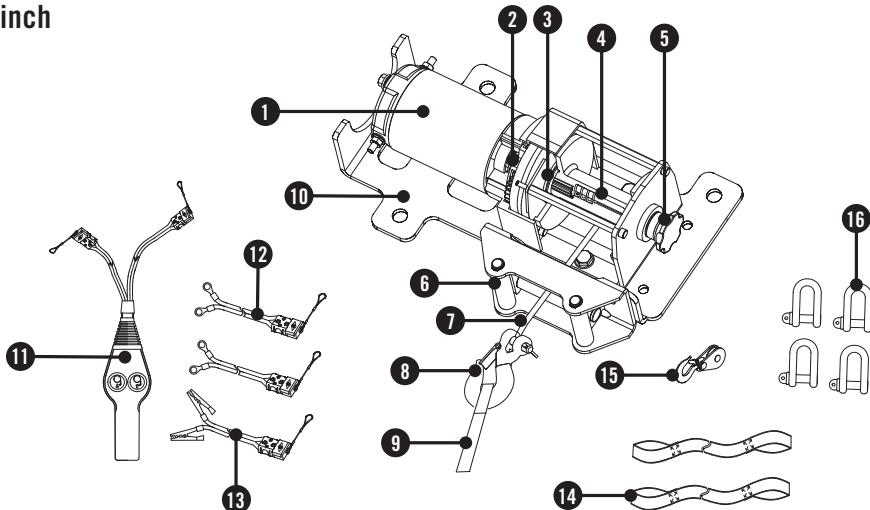

- (1) **Motor** - 1.3 HP/1 kW 12V DC motor provides power to the planetary gear mechanism.
- (2) **Planetary Gear System** - The reduction gears convert the winch motor power into extreme pulling forces. This system allows high torque while maintaining compact size and light weight.
- (3) **Braking System** - Braking action is automatically applied to the winch drum when the winch motor is stopped and there is a load on the wire rope.
- (4) **Winch Drum** - The winch drum is the cylinder on which the wire rope is stored. It can feed or wind the rope depending on the remote winch switch.
- (5) **Free Spooling Clutch** - The clutch allows the operator to manually disengage ("Out") the spooling drum from the gear train, free spool. Engaging the clutch ("In") locks the winch into the gear system.
- (6) **Roller Fairlead** - When using the winch at an angle the roller fairlead acts to guide the wire rope onto the drum and minimizes damage to the wire rope from abrasion on the winch mount or bumper.
- (7) **Wire Rope** - 3/16 in. x 45.9 ft. (4.8mm x 14m) galvanized aircraft cable designed specifically for load capacity of 3,000 lb (1,361 kg). The wire rope feeds onto the drum in the "under wind" position through the roller fairlead (6) and is looped at the end to accept the clevis hook pin(8).
- (8) **Clevis Hook** - Provides a means for connecting the looped ends of cables to an anchor.
- (9) **Strap** - Used to assist cable feed.
- (10) **Mounting Channel**
- (11) **Remote Control** - Powers the cable in or out of your winch drum
- (12) **Quick Connect Cables**
- (13) **Quick Connect Cables with Clamp**
- (14) **Anchor Strap**
- (15) **Snatch Block** - Used properly, the snatch block can double the pulling power of winch, or change your pulling directly without damaging the wire rope.
- (16) **D Shackle** - Provides a means for connecting the looped ends of cables, straps and snatch blocks.

Assembling the Winch

1. Insert M10x20 bolts through the mounting channel holes and attach the roller fairlead to the mounting channel with the M10 lock nuts provided.(A)

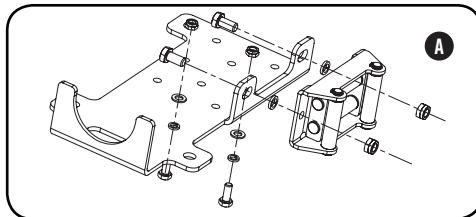

2. Turn the winch upside down. Place the mounting channel on the winch, making sure the winch is centered in the middle of it.
3. Thread the M8x35 bolts through the M8 flat and lockers washers, and then thread through the mounting channel. Tighten the bolts. DO NOT over tighten.
4. Turn winch right side up. Disengage the clutch by moving the Cam Ring to the "Out" position. Release the wire rope and pull through the roller fairlead.
5. Attach the clevis hook to the cable, and then hand strap to the clevis hook.

! CAUTION

Mounting bolts must be SAE grade 5 or better and torque to 34 ft. lb.

CAUTION

If utilizing a mounting plate, ensure that the three major sections (motor, drum and gear housing) are properly aligned. Proper alignment of the winch will allow for even distribution of the full rated load.

Mounting the Winch

This winch kit is designed to be used in 2 different applications:

- 1)Plate Mount
- 2)Mobile

1. Plate Mount

This winch kit is designed with a bolt pattern that is standard in this class of winch. Many winch mounting kits are available that utilize this bolt pattern for the most popular UTV's and ATV's. If you cannot find a kit locally, contact CPE and we will provide you with the name of a dealer.

Simply bolt the winch and roller fairlead straight to the mounting kit on your vehicle. If your kit does not have a place for the fairlead, attach the winch to the mounting channel (steps 1-5 on Assembling the Winch), then bolt on to the vehicle's kit.

NOTE

The type of vehicle to which the winch and mounting channel will be applied, will dictate the type of mounting kit that should be used (Speed Mount™ Hitch Adapter, Standard Mounting Channel, or Specialty Mounting Kit).

2. Mobile

If you do not wish to mount the winch to your vehicles frame, or lack the proper receiver tube, you can use the winch in a "floating" application using the rope slings provided.

Assemble the winch (steps 1-5 on Assembling the Winch), then attach the "D" shackles to the larger, off-center holes at rear end of the mounting plate. See page 9 for "floating" technique.

OPERATION

General Tips for Safe Operation

Your 100124 winch is rated at a 3,000 lb. (1,361 kg) capacity in first layer (max) when spooling the first rope layer on the drum. Overloads can damage the winch, motor and/or wire rope. For loads over 1,500 lb. (680 kg) we recommend the use of the pulley block/snatch block to double the wire rope line. This will aid in two ways:

- (a) reduce the number of rope layers on the drum, as well as,
- (b) reduce the load on the wire rope by as much as 50%.

When doubling the line back to the vehicle, attach to the tow hook, frame or other load bearing part. The vehicle engine should be kept running during operation of the winch to minimize battery drain and maximize power and speed of the winch. If the winch is used for a considerable time with the engine off the battery may be drained and too weak to restart the motor.

Get to know your winch before you actually need to use it. We recommend that you set up a few test runs to familiarize yourself with rigging techniques, the sounds your winch makes under various loads, the way the cable spools on the drum, etc.


Inspect the wire rope and equipment before each use. A frayed or damaged rope shall be replaced immediately. Use only manufacturer's identical replacement rope with the exact specifications.

Inspect the winch installation and bolts to ensure that all bolts are tight before each operation. Store the remote control inside your vehicle in a place that it will not be damaged.


Any winch that appears to be damaged in any way, is found to be worn, or operates abnormally MUST BE REMOVED FROM SERVICE UNTIL REPAIRED. It is recommended that the necessary repairs be made by a manufacturer's authorized repair facility. Pull only on areas of the vehicle as specified by the vehicle manufacturer. Only attachments and/or adapters supplied by the manufacturer are to be used.

Self Recovery

Locate a suitable anchor such as a strong tree trunk or boulder. Always use a sling as an anchor point.

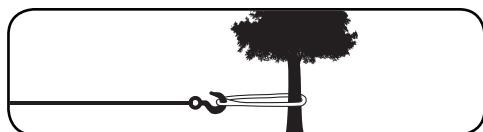


Your winch is equipped with a roller fairlead to help guide the wire rope and to reduce binding on short side pulls. Do not winch from an acute angle as the wire rope will pile up on one side of the drum causing damage to wire rope and the winch.

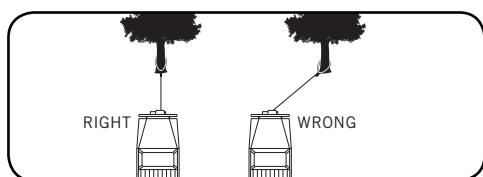


Short pulls from an angle can be used to straighten the vehicle. Long pulls should be done with the wire rope at a 90° angle to the winch/vehicle.

When pulling a heavy load, place a blanket or jacket over the wire rope 5 to 6 ft. (1.5 to 1.8 m) from the hook.

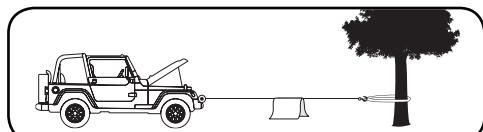

In the event of a broken cable it will dampen the snap back. For additional protection open the hood of the vehicle. For pulls over 1,500 lb. (680 kg), we recommend the use of the snatch block/pulley block to double line the wire rope.

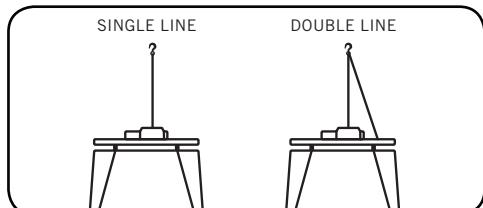

This reduces the load on the winch and the strain on the rope by approximately 50%.

Winching Techniques A-Z

- (a) Take time to assess your situation and plan your pull.
- (b) Put on gloves to protect your hands.
- (c) Disengage the clutch to allow free- spooling and also save battery power.
- (d) Attach the hook strap to the clevis hook.
- (e) Pull out the wire rope to your desired anchor point using the hook strap.
- (f) Secure the clevis hook to the anchor point: Sling, chain or snatch block. Do not attach the hook back onto the wire rope.
- (g) Engage the clutch.
- (h) Connect the remote control to the winch. If you are going to control the winch from inside your vehicle then pass the remote through an open window to avoid the wires being pinched in the door.
- (i) Start your engine to ensure power is being replenished to the battery.
- (j) Drape a blanket or jacket over the wire rope approximately 5 to 6 ft. (1.5 to 1.8 m) from the hook. Open the hood for added protection.
- (k) Power in the wire rope guiding the wire under tension to draw up the slack in the wire. Once the wire is under tension, stand clear. Never step over the wire rope.
- (l) Double check your anchors and make sure all connections are secure.
- (m) Inspect the wire rope. Make sure there are at least 5 wraps of wire rope around the winch drum.
- (n) Clear the area. Make sure all spectators stand clear and that no one is directly in front or behind the vehicle or anchor point.
- (o) Begin winching. Be sure that the wire rope is winding evenly and tightly around the drum. The vehicle that is being winched can be slowly driven to add assistance to the winching process. Avoid shock loads; keep the wire rope under tension.

Winching Techniques A-Z Cont'd.


- (p) The vehicle to be winched should be placed in neutral and the emergency brake released. Only release the brake pedal when under full tension. Avoid shock loads to the winch. This can damage the winch, rope and vehicle.
- (q) The winch is meant for intermittent use. Under full load with a single line rig do not power in for more than a minute without letting the motor cool down for a few minutes and then resume the winching operation.
- (r) The winching operation is complete once the vehicle is on stable ground and is able to drive under its own power.
- (s) Secure the vehicle. Be sure to set the brakes and place the vehicle in park.
- (t) Release the tension on the wire rope. The winch is not meant to hold the vehicle for long periods of time.
- (u) Disconnect the wire rope from the anchor.
- (v) Rewind the wire rope. Make sure that any wire already on the drum has spooled tightly and neatly. If not, draw out the wire and re-spool from the point where the rope is tight.
- (w) Keep your hands clear of the winch drum and fairlead as the wire rope is being drawn in.
- (x) Secure the hook and hook strap.
- (y) Disconnect the remote control and store in a clean, dry place.
- (z) Clean and inspect connections and mounting hardware for next winching operation.

OPERATION


“Floating” Winch Technique

A “Floating” winch technique means that the winch and mounting plate are not bolted to the frame of a vehicle, but instead are left floating in the air based on the tension of the wire cable and rope slings with D-shackles. In the “floating” winch technique you will use your 8 ft. (2.4 m) rope slings and D-shackles provided.

- (1) Remove your winch from the storage bag and place it on the ground with the roller fairlead facing the direction you wish to pull.
- (2) Ensure it is properly attached to the mounting channel per the instructions in the Assembling the Winch section.
- (3) Attach a D-shackle in one of the large, off-center holes at the rear end of the mounting channel. (A)

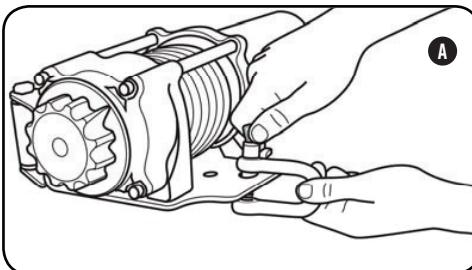

- (4) Wrap a rope sling around a secure section of your vehicle's frame (B), and secure the sling to the D-shackle on the mounting channel.

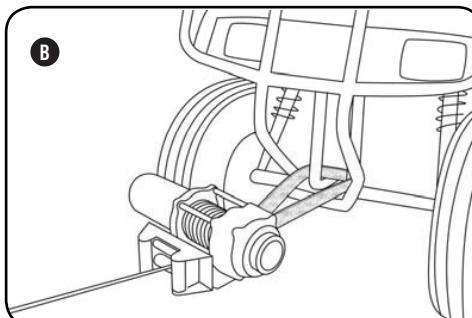

Floating Winch Technique Cont'd.

- (5) Follow steps 3-4 for second mounting channel hole, D-shackle and rope sling.
- (6) Now follow steps A-Z on the previous page to accurately complete your pull.

WARNING

Make sure the rope sling(s) will not come in contact with hot surfaces or sharp objects.

Do not wrap the rope sling(s) around your vehicles frame multiple times. The sling needs to be free to move in order to realign with the anchor point and distribute the load evenly.

Ensure the D-shackle(s) and rope sling(s) are secure before the winch is operational, loose connections could result in faulty winching, property damage, or injury.

NOTE

If a snatch block is needed, run the cable through and double back and connect the clevis hook to the hole in the front of the mounting channel next to the front of the winch.

The owner/operator is responsible for all periodic maintenance.

⚠️ **WARNING**

Never operate a damaged or defective winch.

⚠️ **WARNING**

Improper maintenance will void your warranty.

Complete all scheduled maintenance in a timely manner. Correct any issue before operating the winch.

💬 **NOTE**

For service or parts assistance, contact our help line at **1-877-338-0999**

Lubrication

All moving parts within the electric winch having been lubricated using high temperature lithium grease at the factory. No internal lubrication is required. Lubricate cable assembly periodically using a light penetrating oil.

Cable Assembly Replacement

It is recommended that any modifications be performed by a manufacturer's authorized repair facility, and that only manufacturer-supplied parts be used.

1. Move the clutch to the "Out" position.
2. Extend cable assembly to its full length. Note how the existing cable is connected to the inside of the drum.
3. Remove old cable assembly and attach new one.
4. Retract cable assembly onto drum being careful not to allow kinking.

TROUBLESHOOTING

Problem	Cause	Solution
Motor does not turn on	Loose battery cable connections	Tighten nuts on all cable connections
	Defective switch assembly	Replace switch assembly
	Defective motor	Check for voltage at armature port with switch pressed. If voltage is present, replace motor
	Water has entered motor	Allow to drain and dry. Run in short bursts without load until completely dry
Motor runs but cable drum does not turn	Clutch not engaged	Move clutch to the "In" position. If problem persists, a qualified technician needs to check and repair
Motor runs slowly or without normal power	Insufficient current or voltage	The battery is weak, recharge. Run winch with vehicle motor running (battery should have a strong charge)
	Loose or corroded battery cable connections.	Clean, tighten, or replace
Motor overheating	Winch running time too long	Allow winch to cool down periodically
Motor runs in one direction only	Defective switch assembly	Replace switch assembly

For further technical support:

Technical Service

Mon – Fri 8:30 AM – 5:00 PM (PST/PDT)

Toll Free: 1-877-338-0999

tech@championpowerequipment.com

Performance Specifications

– Rated Pull	3,000 lb. (1,361 kg)
– Gear Reduction Ratio	153 : 1
– Motor	Permanent Magnet 1.3 HP/1 kW (12V DC)
– Duty Cycle	Intermittent
– Drum Size	1.2 in. (D) x 2.9 in. (L) [31.5 mm(D) x 73 mm(L)]
– Cable	3/16 in. (D) x 45.9 ft. (L) [4.8 mm(D) x 14 m(L)]
– Gross Weight	33.1 lb. (15 kg)
– Net Weight	30.2 lb. (13.7 kg)
– Height	4.3 in. (10.8 cm)
– Width	4.3 in. (11 cm)
– Length	12 in. (30.4 cm)
– Bolt Pattern	3.1 in. (8 cm)

Line Speed and Motor Current (First Layer)					
Line Pull	LB	0	1000	2000	3000
	KG	0	454	907	1361
Line Speed (12V DC)	FPM	11.2	8.8	7.2	3.9
	MPM	3.4	2.7	2.2	1.2
Motor Current (12V DC)	A	15	80	120	150
Running Time*	Minutes	1	1	1	1
Cooling Time**	Minutes	5	5	5	5

*If the motor becomes uncomfortably hot to the touch, stop winching immediately and let it cool down for 5 minutes. Do not pull for more than one minute at or near the rated load.


**Electric winches are designed and made for intermittent use and should not be used in constant duty applications.

Line Pull and Cable Capacity Per Layer						
Line of Cable		1	2	3	4	5
Rated Line Pull	LB	3000	2373	1962	1673	1470
	KG	1361	1077	891	759	667
Cable Capacity	FT	5.6	12.1	19.7	27.9	37.1
	M	1.7	3.7	6.0	8.5	11.3

It is recommended to use double line and snatch block for pulling loads over 1,500 lb. (680 kg).

SPECIFICATIONS

Parts Diagram

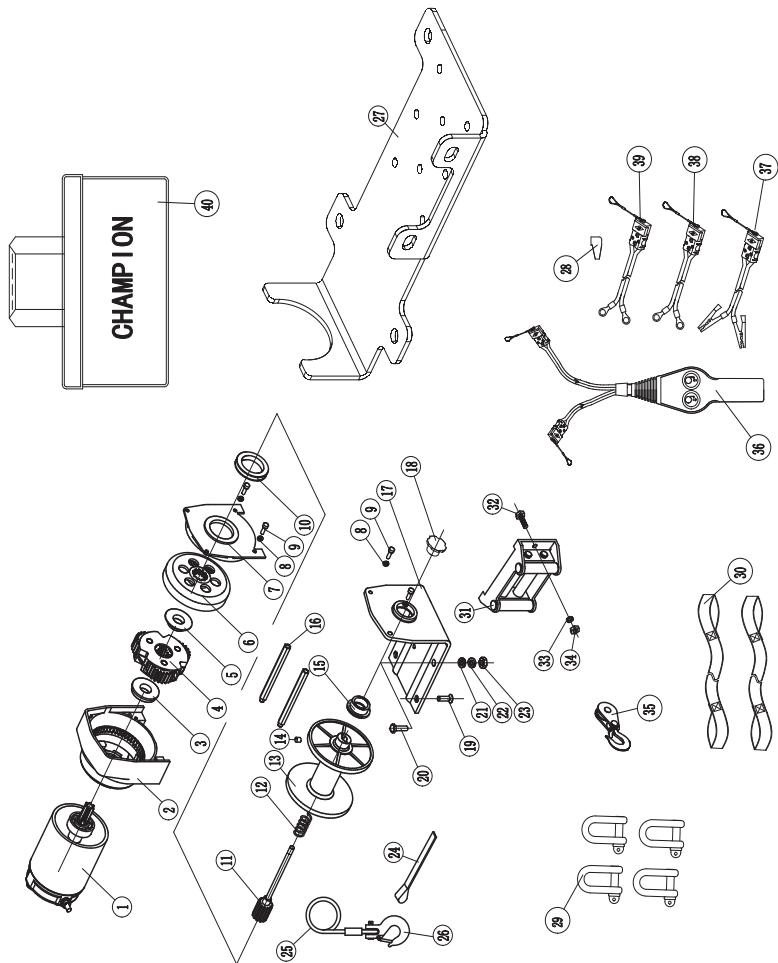

#	Part Number	Description	Qty
1	300100-BF	Motor - Black Flat	1
2	300200-BF	Stationary Gear Housing Assembly - Black Flat	1
3	300025-N	Support Ring	1
4	300300-N	Gear Carrier Assembly	1
5	200029-N	Antifriction Gasket	1
6	300001-N	T-Series Rotator Gear	1
7	300002-BF	Drum Support Plate - Black Flat	1
8	300003	Washer Ø5, Locking	4
9	300004	Hexagon Socket Head Screw M5 x 12	4
10	300005-N	Drum Support Bushing	1
11	300400-C	Clutch Assembly	1
12	300006	Spring	1
13	300007-N	Drum Assembly	1
14	300008	Screw M5 x 8	1
15	300010-N	T-Series Bushing	1
16	300012	Tie Bar	2
17	300013-BF	T-Series Base Plate - Black Flat	1
18	300500-C	T-Series F/W Knob	1
19	300016	Hexagon Socket Countersunk Head Screw M6 x 16	2
20	300018	Hexagon Head Bolt M8 x 35	2
21	300019	Washer Ø8, Flat	2
22	300020	Washer Ø8, Locking	2
23	300021	Nut M8, Locking	2
24	410022	Yellow Strap	1

#	Part Number	Description	Qty
25	300700	Cable Assembly - 4.8mm(D) x 14m(L)	1
26	C20002	1/4 in. Clevis Hook	1
27	301200	Mounting Channel-Black Flat	1
28	400017	Terminal Protector	4
29	300027	D-Shackle, Ø12	4
30	250078	Yellow Anchor Strap, 1 in (W) x 96 in (L)	2
31	250029-BF	Roller Fairlead-Black Flat	1
32	400009	Hexagon Head Bolt M10x20	2
33	250035	Washer Ø10, Locking	2
34	250036	Nut M10, Locking	2
35	C12003	Snatch Block	1
36	301300	Remote Control Assembly - Molded Double Wire with Quick Connector, 8 ft (L) / 8 Gauge	1
37	300029	Spring Clamp Cable with Red Quick Connector, 18 in (L) / 8 Gauge	1
38	300028	Ring terminal cable with Red Quick Connector, 18 in (L) / 8 Gauge	1
39	300030	Winch Connection Cable with Yellow Quick Connector, 12 in (L) / 8 Gauge	1
40	250079	Storage Bag	1

WARRANTY

WARRANTY

CHAMPION POWER EQUIPMENT
2 YEAR LIMITED WARRANTY

Warranty Qualifications

Champion Power Equipment (CPE) will register this warranty upon receipt of your Warranty Registration Card and a copy of your sales receipt from one of CPE's retail locations as proof of purchase.

Please submit your warranty registration and your proof of purchase within ten (10) days of the date of purchase.

Repair/Replacement Warranty

CPE warrants to the original purchaser that the mechanical and electrical components will be free of defects in material and workmanship for a period of two years (parts and labor) from the original date of purchase and 180 days (parts and labor) for commercial and industrial use. Transportation charges on product submitted for repair or replacement under this warranty are the sole responsibility of the purchaser. This warranty only applies to the original purchaser and is not transferable.

Do Not Return The Unit To The Place Of Purchase

Contact CPE's Technical Service and CPE will troubleshoot any issue via phone or e-mail. If the problem is not corrected by this method, CPE will, at its option, authorize evaluation, repair or replacement of the defective part or component at a CPE Service Center. CPE will provide you with a case number for warranty service. Please keep it for future reference. Repairs or replacements without prior authorization, or at an unauthorized repair facility, will not be covered by this warranty.

Warranty Exclusions

This warranty does not cover the following repairs and equipment:

Normal Wear

Products with mechanical and electrical components need periodic parts and service to perform well. This warranty does not cover repair when normal use has exhausted the life of a part or the equipment as a whole.

Installation, Use and Maintenance

This warranty will not apply to parts and/or labor if the product is deemed to have been misused, neglected, involved in an accident, abused, loaded beyond the product's limits, modified, installed improperly or connected incorrectly to any electrical component. Normal maintenance is not covered by this warranty and is not required to be performed at a facility or by a person authorized by CPE.

Other Exclusions

This warranty excludes:

- Cosmetic defects such as paint, decals, etc.
- Wear items such as filter elements, o-rings, etc.
- Accessory parts such as starting batteries, and storage covers.
- Failures due to acts of God and other force majeure events beyond the manufacturer's control.
- Problems caused by parts that are not original Champion Power Equipment parts.

Limits of Implied Warranty and Consequential Damage

Champion Power Equipment disclaims any obligation to cover any loss of time, use of this product, freight, or any incidental or consequential claim by anyone from using this product. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

A unit provided as an exchange will be subject to the warranty of the original unit. The length of the warranty governing the exchanged unit will remain calculated by reference to the purchase date of the original unit.

This warranty gives you certain legal rights which may change from state to state or province to province. Your state or province may also have other rights you may be entitled to that are not listed within this warranty.

Contact Information

Address

Champion Power Equipment, Inc.
Customer Service
12039 Smith Ave.
Santa Fe Springs, CA 90670 USA
www.championpowerequipment.com

Customer Service

Mon – Fri 8:30 AM – 5:00 PM (PST/PDT)
Toll Free: 1-877-338-0999
info@championpowerequipment.com
Fax no.: 1-562-236-9429

Technical Service

Mon – Fri 8:30 AM – 5:00 PM (PST/PDT)
Toll Free: 1-877-338-0999
tech@championpowerequipment.com
24/7 Tech Support: 1-562-204-1188